

COMPACT DESIGN



With Pushbuttons

Without Pushbuttons

The z-axis mechanism of the miniature Hall effect joystick knob means that it can rotate horizontally up to 60°. Z-Axis options include detent, friction hold or spring return to center. Its compact design is the ideal solution where space is limited and precision control is required, while its robust construction is suited for demanding applications.

The JHT joystick has been tested to five million cycles in all directions with no degradation of performance. The Z-Axis and/or pushbuttons have been tested to one million cycles. Various gating options are also available. The JHT Z-Axis electronics are sealed to IP68S and can withstand EMI/RFI per SAE J1113 specifications. The JHT Z-Axis has numerous applications and is ideal for construction equipment, unmanned vehicles, hydraulic controls, industrial vehicle controls, medical and surgical equipment, remote control boxes and surveillance cameras.

Features:

- 60° rotational movement of the ergonomic knob
- Compact design
- Contactless analog output Hall effect technology
- 5 million operational cycles in all directions (Joystick)
- Joystick electronics sealed per IP68S
- Optional pushbutton switches available
- 3.3V SPI & 5V SPI or Analog Output Options
- RoHS compliant

Environmental Ratings and Materials:

ENVIRONMENTAL:

Operating Temp Range: -40°C to +85°C

Seal: Joystick electronics without pushbutton sealed to IP68S
Keypad electronics sealed to IP65S

EMI/RFI: Withstand per SAE J1113

MATERIALS:

Housing: Thermoplastic, black

Bellows: Silicone, black. Additional materials available, contact factory.

Standard Characteristics/Ratings:

GENERAL:

Sensor Type: Hall effect analog, factory programmed ground and supply line break detection; over voltage and reverse voltage protection

Design: Contactless sensing

ELECTRICAL RATINGS: Rated at Vcc = 5V @ 20°C Load = 1ma (4.7KΩ)

Electrical - Analog Joystick

| | Units | Min | Typ | Max |
|---|--------------|-----|-----|-----|
| Supply Voltage | VDC | 4.5 | 5 | 5.5 |
| Output Voltage Tolerance at Center | VDC @ 5V Vcc | -25 | N/A | +25 |
| Output Voltage Tolerance Full Travel | VDC @ 5V Vcc | -25 | N/A | +25 |
| Supply Current* (B = 0, Vcc = 5V, Io = 0) | mA | N/A | 10 | 12 |
| Output Impedance | kΩ | N/A | 1 | N/A |

*Single output per axis. Dual output per axis available. Supply current 20mA typical.

Electrical - Joystick Z-Axis Return to Center

| | Units | Min | Typ | Max |
|---|--------------|------|------|------|
| Supply Voltage | VDC | 4.5 | 5 | 5.5 |
| Output 1+2 Voltage, +Z, -Z 0° Deflection | VDC @ 5V Vcc | 2.25 | 2.50 | 2.75 |
| Output 1+2 at Full Travel +Z Direction | VDC @ 5V Vcc | 4.25 | 4.50 | 4.55 |
| Output 1+2 at Full Travel -Z Direction | VDC @ 5V Vcc | 0.45 | 0.50 | 0.75 |
| Supply current (per sensor) B = 0, Vcc = 5V, Io = 0 | mA | N/A | N/A | 10.0 |
| Output - Source Current Limit B = -X, Vo = 0 | mA | -1.0 | N/A | 1.0 |

Electrical - Joystick Z-Axis Friction

| | Units | Min | Typ | Max |
|---|--------------|------|------|------|
| Supply Voltage | VDC | 4.5 | 5 | 5.5 |
| Output 1+2 at Full Travel +Z Direction | VDC @ 5V Vcc | 4.25 | 4.50 | 4.55 |
| Output 1+2 at Full Travel -Z Direction | VDC @ 5V Vcc | 0.45 | 0.50 | 0.75 |
| Supply Current (per sensor) (B = 0, Vcc = 5V, Io = 0) | mA | N/A | N/A | 10 |
| Output - Source Current Limit B = -X, Vo = 0 | mA | -1.0 | N/A | 1.0 |

Electrical - Joystick Z-Axis 3 Detent

| | Units | Min | Typ | Max |
|---|--------------|------|------|------|
| Supply Voltage | VDC | 4.5 | 5 | 5.5 |
| Output 1+2 Voltage, +Z, -Z 0° Deflection | VDC @ 5V Vcc | 2.25 | 2.50 | 2.75 |
| Output 1+2 at Full Travel +Z Direction | VDC @ 5V Vcc | 4.25 | 4.50 | 4.55 |
| Output 1+2 at Full Travel -Z Direction | VDC @ 5V Vcc | 0.45 | 0.50 | 0.75 |
| Supply current (per sensor) B = 0, Vcc = 5V, Io = 0 | mA | N/A | N/A | 10.0 |
| Output - Source Current Limit B = -X, Vo = 0 | mA | -1.0 | N/A | 1.0 |

Joystick

Mechanical Life: 5,000,000 cycles in all directions

| | Units | Min | Typ | Max |
|---|---------|-----|-----|-----|
| Travel Angle | Degrees | 18 | 20 | 22 |
| Over Travel Angle | Degrees | 0.5 | 1.0 | 1.5 |
| Max Allowable Radial Force (Styles 11, 12 & 21) @ GRP | Lbs. | N/A | N/A | 50 |
| Max Allowable Radial Force (All Other Styles) @ GRP | Lbs. | N/A | N/A | 15 |

Z-Axis


Mechanical Life: 1,000,000 cycles in all directions

| | Units | Min | Typ | Max |
|---------------------------------------|---------|-----|-----|-----|
| Travel Angle (Total) | Degrees | 56 | 60 | 64 |
| Operational Torque with Detent | OZ | 10 | 20 | 30 |
| Operational Torque with Friction Hold | OZ | 1.0 | 4.0 | 7.0 |
| Operational Torque Return to Center | OZ | 8.0 | 16 | 24 |

MINIATURE Z-AXIS HALL EFFECT JOYSTICK





JHT
Z-AXIS MINI
JOYSTICK

COMPACT DESIGN

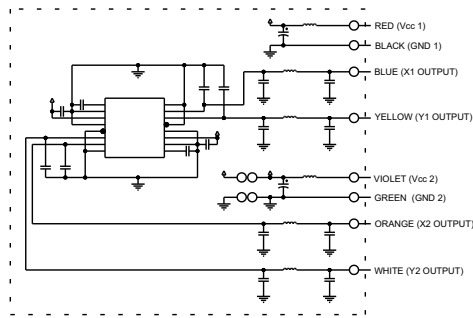


GENERAL SCHEMATIC

(WIRE BUNDLE 1)
ALL OUTPUTS ARE NOT PRESENT IN ALL CONFIGURATIONS

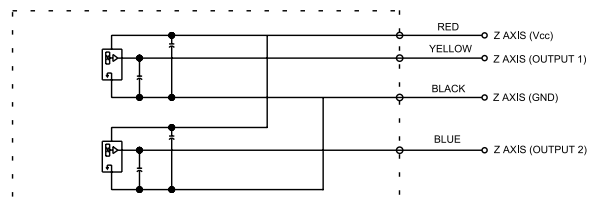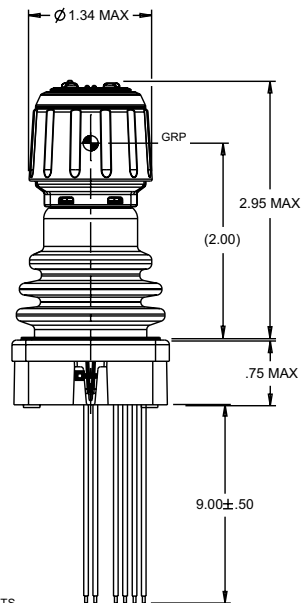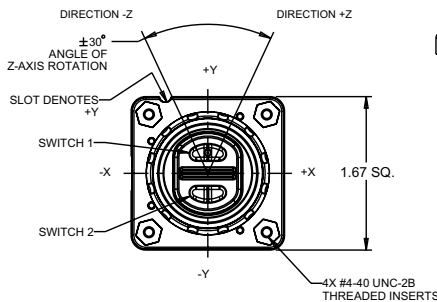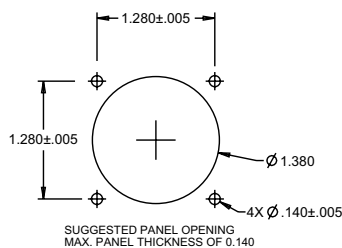


Z AXIS SCHEMATIC

(WIRE BUNDLE 2)
ALL WIRES ARE NOT PRESENT IN ALL CONFIGURATIONS

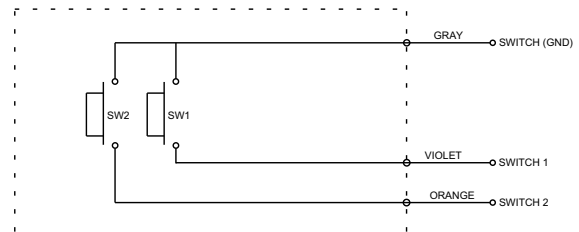

KEYPAD SCHEMATIC

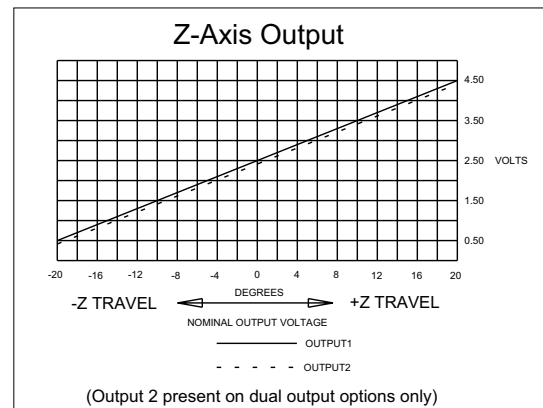

JHT Z-AXIS PART NUMBER CODE

JHT - XX

Switch/Boot Style (All Half Boot)

- 32. Z-Axis with Detent, Single Output
- 42. Z-Axis with Friction Hold, Single Output
- 52. Z-Axis Return to Center, Single Output
- 62. Z-Axis with Detent, Dual Output
- 72. Z-Axis with Friction Hold, Dual Output
- 82. Z-Axis Return to Center, Dual Output
- 92. Z-Axis with Detent, Single Output with Two Pushbuttons
- A2. Z-Axis with Friction, Single Output with Two Pushbuttons
- B2. Z-Axis Return to Center, Single Output with Two Pushbuttons
- C2. Z-Axis with Detent, Dual Output with Two Pushbuttons
- D2. Z-Axis with Friction, Dual Output with Two Pushbuttons
- E2. Z-Axis Return to Center, Dual Output with Two Pushbuttons

*Gated = Restricted movement in XY axis only. Gating Icons shown on page 111 in the JHT mini joystick section.

**Z-Axis and Pushbuttons are not part of the SPI message.

***Outputs LL & MM must be used with termination option 2. Cable termination option only available with LL & MM options.

NOTES (Applies to Joystick Output Only):

- Outputs are from the center to the full travel position in each direction.
- Options "AA", "BB", "CC", "DD", "EE" and "FF" provide increased voltage in +X, +Y; and decreasing voltage in -X, -Y direction from one output per axis.
- Options "GG" and "HH" provide increasing voltages in all directions (+X, +Y, -X, -Y) from 2 outputs per axis.
- Options "BB" and "EE" provide redundant output 2 which duplicates output 1. Options "CC" and "FF" provide redundant output 2 which is inverse of output 1.

X X XX X N

Gating*

1. Gated; Single axis – Return to Center
2. Gated; Two axis – Return to Center
3. Omni-directional; Round Smooth Feel
4. Omni-directional; Round On-Axis and Off-Axis Guided Feel
5. Omni-directional; Round On-Axis Guided Feel

Operating Force

1.1 lb

Joystick Output 1

- AA. 2.5 +/- 2.0VDC
- BB. 2.5 +/- 2.0VDC
- CC. 2.5 +/- 2.0VDC
- DD. 2.5 +/- 1.5VDC
- EE. 2.5 +/- 1.5VDC
- FF. 2.5 +/- 1.5VDC
- GG. 0.5 - 4.5VDC
- HH. 1.0 - 4.0VDC
- JJ. SPI, 3.3V Supply**
- KK. SPI, 5V Supply**
- LL. CANopen***
- MM. J1939***

Joystick Output 2

- NONE
- 2.5 +/- 2.0VDC
- 2.5 +/- 2.0VDC
- NONE
- 2.5 +/- 1.5VDC
- 2.5 +/- 1.5VDC
- 0.5 - 4.5VDC
- 1.0 - 4.0VDC
- NONE
- NONE
- NONE
- NONE

Termination

1. 24 AWG Wire Leads
2. Cable, 22 AWG (19/34) PVC / Polyurethane outer jacket (11" long not shown)***

Votre distributeur officiel




ALDERS
Indicate. Control. Connect.

ALDERS electronic GmbH
Arnoldstraße 19
47906 Kempen - Allemagne
+33 3 88064677
+33 6 33389393
catherine.sturm@alders.fr / www.alders.fr


COMPACT DESIGN

Joystick Output Configuration


OPTION AA

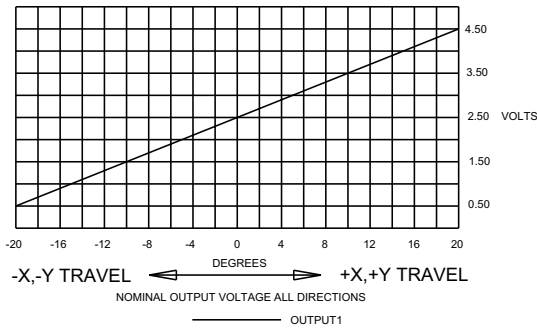


OPTION BB

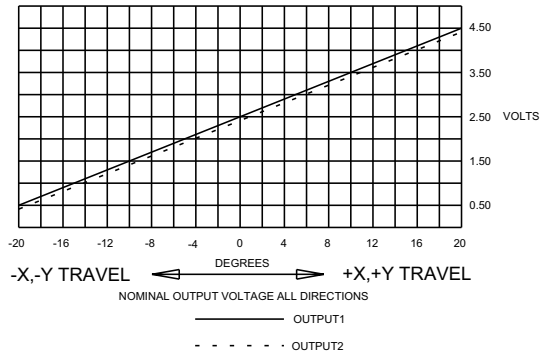


OPTION CC

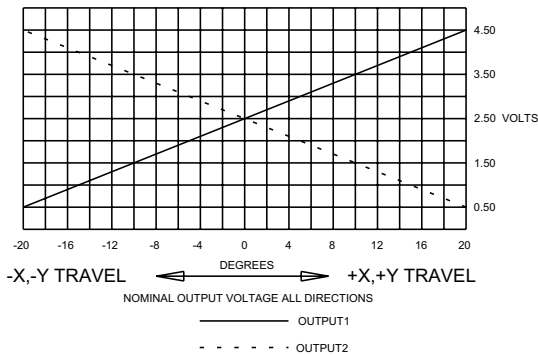


OPTION DD

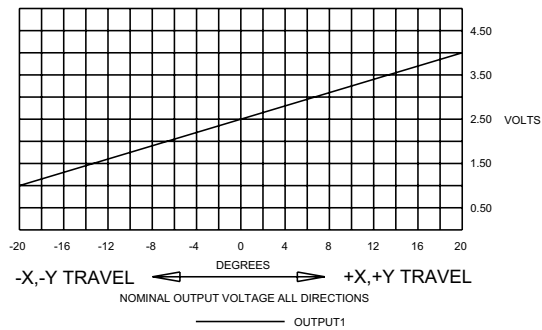


OPTION EE

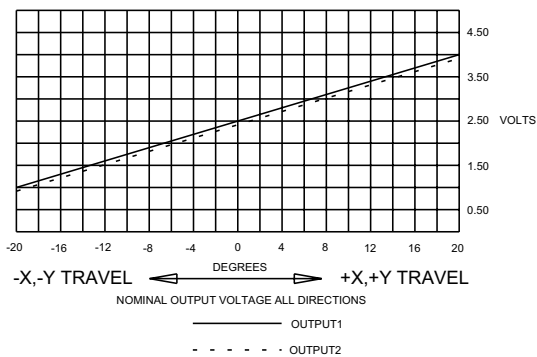

OPTION FF

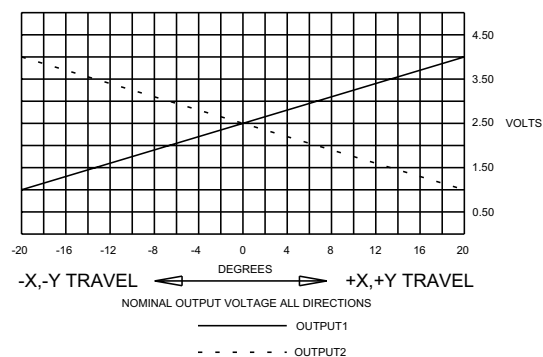

OPTION GG

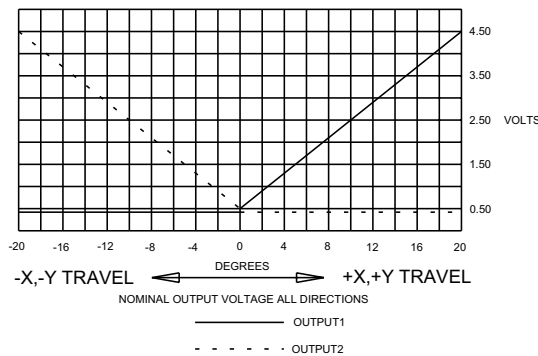

OPTION HH

