

MINI JOYSTICK

The J4 Hall effect transducer, like a strain gauge based transducer, converts an input force to a linear output voltage. However, the J4 is a cost effective alternative to a strain gauge type transducer. The J4 construction is rugged enough for the most demanding applications.

The J4's shorter travel offers the benefit of minimal movement required for analog voltage output change. In addition, the J4 offers the benefit of a higher output voltage than a traditional strain gauge based transducer with the same input voltage.


The J4 can be used for applications such as cursor control, target acquisition or any place precise input control is required. The J4's short behind panel depth means it can be used in an OTTO grip or can be panel mounted.

Features:

- A cost effective alternative to strain gauge based technology
- Mini joystick function
- 5V DC input
- Proven Hall effect technology
- Magnetic shielding in case offers excellent external EMI protection
- Rugged construction for demanding applications



J4-100001
Transducer

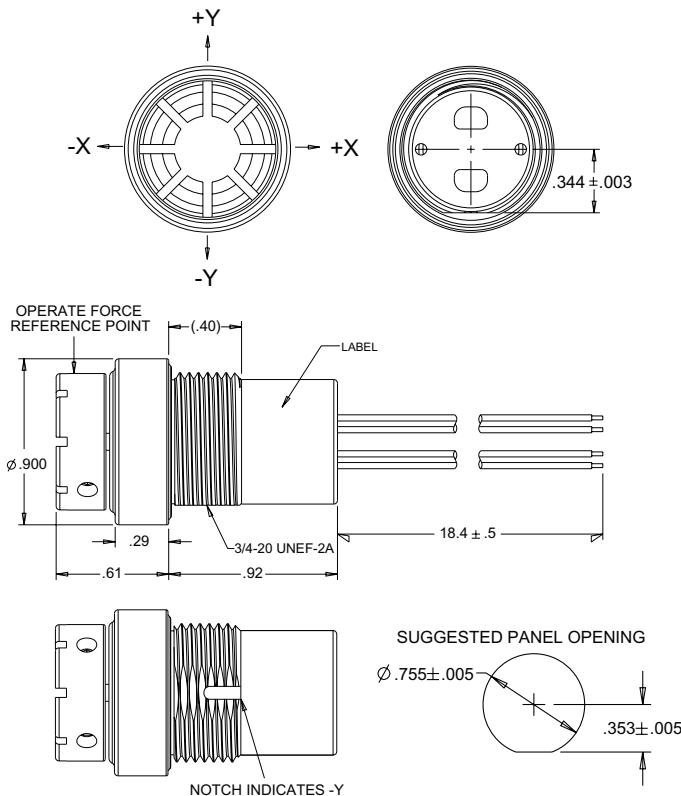

| Standard Characteristics/Ratings: | | | | |
|--|---|---|------------|------------|
| ELECTRICAL RATINGS: | | | | |
| Rated at Vcc = 5V, Load = 1mA (4.7KΩ) | | | | |
| Electrical | Units | Min | Typ | Max |
| Supply Voltage | VDC | 4.50 | 5.00 | 5.50 |
| Output Voltage, +Y,-Y,+X,-X 0° Deflection: | VDC @ 5V Vcc | 2.40 | 2.50 | 2.60 |
| Output at Full Travel -X,-Y Direction: | VDC @ 5V Vcc | 1.35 | 1.50 | 1.65 |
| Output at Full Travel +X,+Y Direction: | VDC @ 5V Vcc | 3.35 | 3.50 | 3.65 |
| Supply Current B=0, Vcc=5V, Io=0: | mA | N/A | 20 | 24 |
| Output Impedance: | kΩ | N/A | 1.0 | N/A |
| MECHANICAL RATINGS: | | | | |
| Mechanical Life All Directions | 250,000 cycles | | | |
| Mechanical | Units | Min | Typ | Max |
| Operating Force (w/ Boot) at Top of Button @ 20° C: | OZ | N/A | 3.0 | 3.1 |
| Max Allowable Vertical Force on Button: | LBS | N/A | N/A | 10 |
| Max Allowable Radial Force on Top of Knob: | LBS | N/A | N/A | 5 |
| ENVIRONMENTAL: | | | | |
| Operating Temperature: | °C | -20 | 20 | 71 |
| Null Temperature Coefficient: | °C | +/- .5% of full scale output per degree C max | | |
| Electronics Enclosure Design: | ISO 20653, Dusttight and watertight per IP68S | | | |
| Drop: | 1 meter max to concrete | | | |
| EMI Withstand: | Per ISO 11452 | | | |
| RFI Withstand: | Per ISO 11452-8 15Hz-100kHz | | | |
| DC Magnetic Field Withstand: | 3000 A/m per ISO 11452-8 | | | |
| MATERIALS: | | | | |
| Button: | Thermoplastic, black | | | |
| Case: | Black anodized aluminum | | | |
| Boot: | Silicon rubber, black | | | |
| Wires: | 24 AWG, NEMA HP3, Type E | | | |
| Mounting Hardware: | Brass hex nut (.13 Thick) and lockwasher | | | |