


SINGLE POLE SOCKETS - SWAGE MOUNT

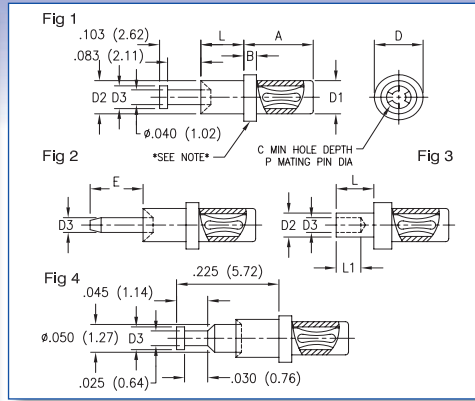

Dimensions in inches (mm)
See page 91 for recommended Anvil and Punch

How to order code

450 - XXXX - XX - XX - 00

Basic Part No. Finish

Material Code Table		
Component	Material	RoHS
Body	Brass	✓
Spring	Beryllium Copper (Heat Treated)	✓

Finish Code Table			
Dash No.	Body Finish	Spring Finish	RoHS
-03	Gold over Nickel	Gold over Nickel	✓
-04	Electro-Tin	Electro-Tin	✓
-06	Electro-Tin	Gold over Nickel	✓

Fig.	Basic Part No.	L	Board Thickness	P	A	B	C	D	D1	D2	D3	E	L1	Mtg. Hole Diameter
1	450-3375 -02	.094 (2.39)	.062 (1.57)	.025 (0.64)	.106 (2.69)	.062 (1.57)	.141 (3.58)	.125 (3.18)	.077 (1.96)	.093 (2.36)	.062 (1.57)	-	-	.094 (2.39)
	-03	.125 (3.18)	.094 (2.39)		.075 (1.91)	.031 (0.79)								
	-04	.156 (3.96)	.125 (3.18)											
	-05	.219 (5.56)	.188 (4.76)											
	450-7005 -01*	.062 (1.57)	.031 (0.79)	.031 (0.79)	.193 (4.90)	.032 (0.81)	.183 (4.65)	.125 (3.18)	.092 (2.34)	.093 (2.36)	.066 (1.68)	-	-	.094 (2.39)
	-02*	.094 (2.39)	.062 (1.57)											
	-03*	.125 (3.18)	.094 (2.39)											
	-04*	.156 (3.96)	.125 (3.18)											
	-05*	.219 (5.56)	.188 (4.76)											
	450-3320 -01	.062 (1.57)	.031 (0.79)	.040 (1.02)	.193 (4.90)	.032 (0.81)	.190 (4.83)	.125 (3.18)	.092 (2.34)	.093 (2.36)	.066 (1.68)	-	-	.094 (2.39)
	-02	.094 (2.39)	.062 (1.57)											
	-03	.125 (3.18)	.094 (2.39)											
	-04	.156 (3.96)	.125 (3.18)											
	-05	.219 (5.56)	.188 (4.76)											
	450-3324 -01	.058 (1.47)	.031 (0.79)	.061 (1.55)	.230 (5.84)	.050 (1.27)	.204 (5.18)	.188 (4.78)	.124 (3.15)	.141 (3.58)	.066 (1.68)	-	-	.144 (3.66)
-02	.089 (2.26)	.062 (1.57)												
-03	.120 (3.05)	.094 (2.39)												
-04	.151 (3.84)	.125 (3.18)												
450-3754 -01	.062 (1.57)	.031 (0.79)	.080 (2.03)	.440 (11.18)	-	.375 (9.53)	-	.144 (3.66)	.093 (2.36)	.066 (1.68)	-	-	.094 (2.39)	
-02	.094 (2.39)	.062 (1.57)												
-03	.125 (3.18)	.094 (2.39)												
-04	.156 (3.96)	.125 (3.18)												
2	450-3263 -01	.051 (1.30)	.031 (0.79)	.025 (0.64)	.180 (4.57)	.045 (1.14)	.144 (3.66)	.094 (2.39)	.074 (1.88)	.058 (1.47)	.025 (0.64)	.125 (3.18)	-	.062 (1.57)
	-02	.082 (2.08)	.062 (1.57)											
	-03	.113 (2.87)	.094 (2.39)											
	-04	.145 (3.68)	.125 (3.18)											
	450-3310 -01	.062 (1.57)	.031 (0.79)	.040 (1.02)	.190 (4.83)	.032 (0.81)	.190 (4.83)	.125 (3.18)	.094 (2.39)	.093 (2.36)	.040 (1.02)	.187 (4.75)	-	.094 (2.39)
	-02	.094 (2.39)	.062 (1.57)											
	-03	.125 (3.18)	.094 (2.39)											
	-04	.156 (3.96)	.125 (3.18)											
3	450-3394 -01	.062 (1.57)	.031 (0.79)	.025 (0.64)	.190 (4.88)	.045 (1.14)	.144 (3.66)	.094 (2.39)	.074 (1.88)	.058 (1.47)	.040 (1.02)	-	.040 (1.02)	.062 (1.57)
	-02	.094 (2.39)	.062 (1.57)											
	-03	.125 (3.18)	.094 (2.39)											
	-04	.156 (3.96)	.125 (3.18)											
	450-3756 -01	.062 (1.57)	.031 (0.79)	.040 (1.02)	.230 (5.84)	.062 (1.57)	.180 (4.57)	.125 (3.18)	.091 (2.31)	.064 (1.63)	.040 (1.02)	-	.040 (1.02)	.067 (1.70)
	-02	.094 (2.39)	.062 (1.57)											
	-03	.125 (3.18)	.094 (2.39)											
	-04	.156 (3.96)	.125 (3.18)											
4	450-3266 -01	.041 (1.04)	.031 (0.79)	.019 (0.48)	.062 (1.57)	.025 (0.64)	.210 (5.33)	.094 (2.39)	.062 (1.57)	.072 (1.83)	.040 (1.02)	-	-	.076 (1.93)
	-02	.072 (1.83)	.062 (1.57)											
	-03	.104 (2.64)	.094 (2.39)											
	-04	.135 (3.43)	.125 (3.18)											

*Knurl is for part identification and to distinguish from similar socket, 450-3320 which is for .040 (1.02mm) diameter