


SOLDER TERMINALS - MOULDED DAP, PIN

Dimensions in inches (mm)

See page 94 for recommended Anvil and Punch

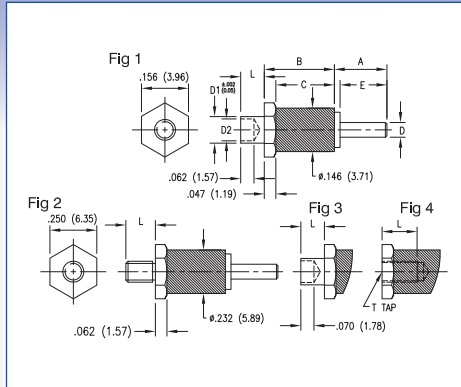

How to order code

572 - 48XX - XX - XX - 16

Basic Part No. | Insulator Colour | Terminal Finish

Material Code Table		
Component	Material	RoHS
Insulator	Diallyl	✓
Mounting Stud	Brass	✓
Terminal	Brass	✓

Finish Code Table			
Dash No.	Terminal Finish	Mtg. Stud Finish	RoHS
-01	Silver	Cadmium	X
-05	Electro-Solder	Cadmium	X
-21	Silver	Nickel	✓


Insulation Colour Code Table	
Dash No.	Colour
-16	Blue

Fig.	Basic Part No.	L	Board Thickness	A	B	C	D	D1	D2	E	T	IR (RMS)
1	572-4892 -01	.094 (2.39)	.062 (1.57)	.188 (4.78)	.391 (9.93)	.344 (8.74)	.060 (1.52)	.078 (1.98)	.067 (1.70)	.168 (4.27)	-	3000
	-02	.125 (3.18)	.094 (2.39)									
2	572-4846 -01	.219 (5.56)	-	.290 (7.37)	.375 (9.53)	.313 (7.95)	.070 (1.78)	-	-	.250 (6.35)	4-40	6000
	572-4852 -01	.219 (5.56)	-	.290 (7.37)	.593 (15.06)	.531 (13.49)	.070 (1.78)	-	-	.250 (6.35)	4-40	6000
3	572-4848 -01	.094 (2.39)	.062 (1.57)	.290 (7.37)	.375 (9.53)	.313 (7.95)	.070 (1.78)	.098 (2.49)	.064 (1.63)	.250 (6.35)	-	6000
	-02	.125 (3.18)	.094 (2.39)									
	-03	.156 (3.96)	.125 (3.18)									
	-04	.234 (5.94)	.188 (4.78)									
4	572-4850 -01	.156 (3.96)	-	.290 (7.37)	.375 (9.53)	.313 (7.95)	.070 (1.78)	-	-	.250 (6.35)	4-40	6000
	572-4851 -01	.156 (3.96)	-	.290 (7.37)	.375 (9.53)	.313 (7.95)	.070 (1.78)	-	-	.250 (6.35)	6-32	6000

Colours available for volume requirements



SOLDER TERMINALS - MOULDED DAP, SINGLE TURRET

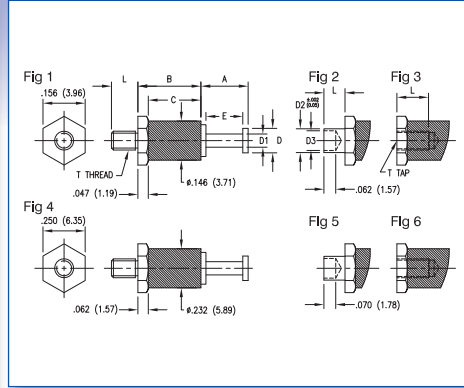

Dimensions in inches (mm)
See page 94 for recommended Anvil and Punch

How to order code
572 - 4XXX - XX - XX - 16
 Basic Part No. | Insulator Colour | Terminal Finish

Material Code Table		
Component	Material	RoHS
Insulator	Diallyl	✓
Mounting Stud	Brass	✓
Terminal	Brass	✓

Finish Code Table			
Dash No.	Terminal Finish	Mtg. Stud Finish	RoHS
-01	Silver	Cadmium	X
-05	Electro-Solder	Cadmium	X
-21	Silver	Nickel	✓

Insulation Colour Code Table	
Dash No.	Colour
-16	Blue


Fig.	Basic Part No.	L	Board Thickness	A	B	C	D	D1	D2	D3	E	T	IR (RMS)
1	572-4870 -01	.125 (3.18)	-	.156 (3.96)	.235 (5.97)	.188 (4.78)	.072 (1.83)	.047 (1.19)	-	-	.116 (2.95)	2-56	3000
	-02	.188 (4.78)	-	.156 (3.96)	.235 (5.97)	.188 (4.78)	.072 (1.83)	.047 (1.19)	-	-	.116 (2.95)	2-56	3000
	-03	.250 (6.35)	-	.156 (3.96)	.235 (5.97)	.188 (4.78)	.072 (1.83)	.047 (1.19)	-	-	.116 (2.95)	2-56	3000
	572-4876 -01	.125 (3.18)	-	.219 (5.56)	.235 (5.97)	.188 (4.78)	.072 (1.83)	.047 (1.19)	-	-	.179 (4.55)	2-56	3000
	-02	.188 (4.78)	-	.219 (5.56)	.235 (5.97)	.188 (4.78)	.072 (1.83)	.047 (1.19)	-	-	.179 (4.55)	2-56	3000
	-03	.250 (6.35)	-	.219 (5.56)	.235 (5.97)	.188 (4.78)	.072 (1.83)	.047 (1.19)	-	-	.179 (4.55)	2-56	3000
	572-4894 -01*	.218 (5.54)	-	.156 (3.96)	.219 (5.56)	.172 (4.37)	.093 (2.36)	.055 (1.40)	-	-	.116 (2.95)	2-56	3000
2	572-4895 -01*	.218 (5.54)	-	.156 (3.96)	.376 (9.55)	.329 (8.36)	.093 (2.36)	.055 (1.40)	-	-	.116 (2.95)	2-56	6000
	572-4900 -01	.118 (3.00)	-	.156 (3.96)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	-	-	.116 (2.95)	M2 x 0.4	3000
	-02	.197 (5.00)	-	.156 (3.96)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	-	-	.116 (2.95)	M2 x 0.4	3000
	572-4903 -01	.118 (3.00)	-	.219 (5.56)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	-	-	.179 (4.55)	M2 x 0.4	3000
	-02	.197 (5.00)	-	.219 (5.56)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	-	-	.179 (4.55)	M2 x 0.4	3000
	-03	.197 (5.00)	-	.219 (5.56)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	-	-	.179 (4.55)	M2 x 0.4	3000
	572-4877 -01	.094 (2.39)	.062 (1.57)	.219 (5.56)	.235 (5.97)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.078 (1.98)	.067 (1.70)	.179 (4.55)	-	3000
3	572-4872 -01	.078 (1.98)	-	.156 (3.96)	.235 (5.97)	.188 (4.78)	.072 (1.83)	.047 (1.19)	-	-	.116 (2.95)	2-56	3000
	572-4875 -01	.117 (2.97)	-	.156 (3.96)	.391 (9.93)	.344 (8.74)	.072 (1.83)	.047 (1.19)	-	-	.116 (2.95)	2-56	3000
	572-4878 -01	.078 (1.98)	-	.219 (5.56)	.235 (5.97)	.188 (4.78)	.072 (1.83)	.047 (1.19)	-	-	.179 (4.55)	2-56	3000
	572-4881 -01	.117 (2.97)	-	.219 (5.56)	.391 (9.93)	.344 (8.74)	.072 (1.83)	.047 (1.19)	-	-	.179 (4.55)	2-56	3000
	572-4902 -01	.079 (2.00)	-	.156 (3.96)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	-	-	.116 (2.95)	M2 x 0.4	3000
	572-4905 -01	.079 (2.00)	-	.219 (5.56)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	-	-	.179 (4.55)	M2 x 0.4	3000
	572-4834 -01	.219 (5.56)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	-	-	.147 (3.73)	4-40	6000
4	572-4835 -01	.219 (5.56)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	-	-	.147 (3.73)	6-32	6000
	-02	.250 (6.35)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	-	-	.147 (3.73)	6-32	6000
	-03	.375 (9.53)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	-	-	.147 (3.73)	6-32	6000
	572-4842 -01	.094 (2.39)	.062 (1.57)	.219 (5.56)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.098 (2.49)	.064 (1.63)	.147 (3.73)	-	6000
	-02	.125 (3.18)	.094 (2.39)	.219 (5.56)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.098 (2.49)	.064 (1.63)	.147 (3.73)	-	6000
	-03	.156 (3.96)	.125 (3.18)	.219 (5.56)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.098 (2.49)	.064 (1.63)	.147 (3.73)	-	6000
	-04	.234 (5.94)	.188 (4.78)	.219 (5.56)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.098 (2.49)	.064 (1.63)	.147 (3.73)	-	6000
5	572-4843 -01	.094 (2.39)	.062 (1.57)	.219 (5.56)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.141 (3.58)	.116 (2.95)	.147 (3.73)	-	6000
	-02	.125 (3.18)	.094 (2.39)	.219 (5.56)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.141 (3.58)	.116 (2.95)	.147 (3.73)	-	6000
	-03	.156 (3.96)	.125 (3.18)	.219 (5.56)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.141 (3.58)	.116 (2.95)	.147 (3.73)	-	6000
	-04	.234 (5.94)	.188 (4.78)	.219 (5.56)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.141 (3.58)	.116 (2.95)	.147 (3.73)	-	6000
	572-4838 -01	.156 (3.96)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	-	-	.147 (3.73)	4-40	6000
	572-4839 -01	.156 (3.96)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	-	-	.147 (3.73)	6-32	6000
	572-4844 -01	.219 (5.56)	-	.219 (5.56)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	-	-	.147 (3.73)	4-40	6000

*Supplied with unassembled nut & lock washer

SOLDER TERMINALS - MOULDED DAP, TWIN TURRET

Dimensions in inches (mm)

See page 94 for recommended Anvil and Punch

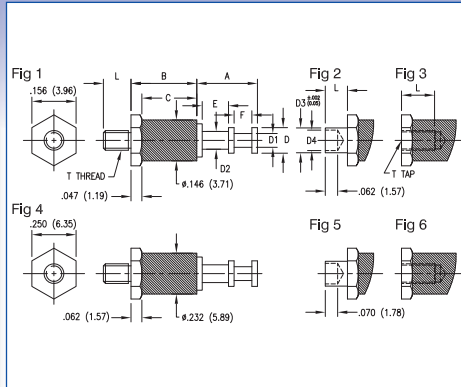

How to order code


572 - 4XXX - XX - XX - 16

Basic Part No. | Insulator Colour | Terminal Finish

Material Code Table			Finish Code Table				Insulation Colour Code Table	
Component	Material	RoHS	Dash No.	Terminal Finish	Mtg. Stud Finish	RoHS	Dash No.	Colour
Insulator	Diallyl	✓	-01	Silver	Cadmium	X	-16	Blue
Mounting Stud	Brass	✓	-05	Electro-Solder	Cadmium	X		
Terminal	Brass	✓	-21	Silver	Nickel	✓		

Fig.	Basic Part No.	L	Board Thickness	A	B	C	D	D1	D2	D3	D4	E	F	T	IR (RMS)
1	572-4882 -01	.125 (3.18)	-	.156 (3.96)	.234 (5.94)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	2-56	3000
	572-4882 -02	.188 (4.78)	-	.156 (3.96)	.234 (5.94)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	2-56	3000
2	572-4906 -01	.118 (3.00)	-	.156 (3.96)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	M2 x 0.4	3000
	572-4906 -02	.197 (5.00)	-	.156 (3.96)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	M2 x 0.4	3000
3	572-4883 -01	.094 (2.39)	.062 (1.57)	.156 (3.96)	.234 (5.94)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.047 (1.19)	.078 (1.98)	.067 (1.70)	.048 (1.22)	.048 (1.22)	-	3000
	572-4883 -02	.125 (3.18)	.094 (2.39)	.156 (3.96)	.234 (5.94)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.047 (1.19)	.078 (1.98)	.067 (1.70)	.048 (1.22)	.048 (1.22)	-	3000
4	572-4884 -01	.078 (1.98)	-	.156 (3.96)	.234 (5.94)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	2-56	3000
	572-4884 -02	.117 (2.97)	-	.156 (3.96)	.234 (5.94)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	2-56	3000
5	572-4810 -01	.219 (5.56)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4810 -02	.250 (6.35)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
6	572-4816 -01	.219 (5.56)	-	.344 (8.74)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4816 -02	.375 (9.53)	-	.344 (8.74)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
7	572-4822 -01	.219 (5.56)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	4-40	6000
	572-4822 -02	.250 (6.35)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	4-40	6000
8	572-4812 -01	.094 (2.39)	.062 (1.57)	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	.098 (2.49)	.064 (1.63)	.148 (3.76)	.094 (2.39)	-	6000
	572-4812 -02	.125 (3.18)	.094 (2.39)	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	.098 (2.49)	.064 (1.63)	.148 (3.76)	.094 (2.39)	-	6000
9	572-4813 -01	.094 (2.39)	.062 (1.57)	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	.141 (3.58)	.116 (2.95)	.148 (3.76)	.094 (2.39)	-	6000
	572-4813 -02	.125 (3.18)	.094 (2.39)	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	.141 (3.58)	.116 (2.95)	.148 (3.76)	.094 (2.39)	-	6000
10	572-4825 -01	.094 (2.39)	.062 (1.57)	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	.141 (3.58)	.116 (2.95)	.093 (2.36)	.063 (1.60)	-	6000
	572-4825 -02	.125 (3.18)	.094 (2.39)	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	.141 (3.58)	.116 (2.95)	.093 (2.36)	.063 (1.60)	-	6000
11	572-4814 -01	.156 (3.96)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4814 -02	.188 (4.78)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
12	572-4820 -01	.219 (5.56)	-	.344 (8.74)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4820 -02	.375 (9.53)	-	.344 (8.74)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
13	572-4826 -01	.156 (3.96)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	4-40	6000
	572-4826 -02	.188 (4.78)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	4-40	6000
14	572-4827 -01	.156 (3.96)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	6-32	6000
	572-4827 -02	.188 (4.78)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	6-32	6000
15	572-4833 -01	.219 (5.56)	-	.219 (5.56)	.594 (15.09)	.531 (13.49)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	6-32	6000
	572-4833 -02	.375 (9.53)	-	.219 (5.56)	.594 (15.09)	.531 (13.49)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	6-32	6000

SOLDER TERMINALS - MOULDED DAP, SLOTTED

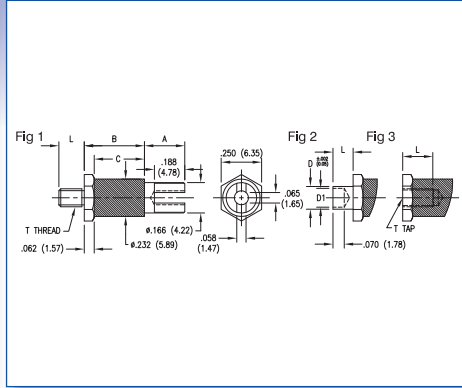

Dimensions in inches (mm)
See page 94 for recommended Anvil and Punch

How to order code
572 - 48XX - XX - XX - 16
 Basic Part No. | Insulator Colour | Terminal Finish

Material Code Table		
Component	Material	RoHS
Insulator	Diallyl	✓
Mounting Stud	Brass	✓
Terminal	Brass	✓

Finish Code Table			
Dash No.	Terminal Finish	Mtg. Stud Finish	RoHS
-01	Silver	Cadmium	X
-05	Electro-Solder	Cadmium	X
-21	Silver	Nickel	✓

Insulation Colour Code Table	
Dash No.	Colour
-16	Blue

Fig.	Basic Part No.	L	Board Thickness	A	B	C	D	D1	T	IR (RMS)
1	572-4858 -01	.219 (5.56)	-	.250 (6.35)	.375 (9.53)	.312 (7.92)	-	-	4-40	6000
	572-4859 -01	.219 (5.56)	-	.250 (6.35)	.375 (9.53)	.312 (7.92)	-	-	6-32	6000
	-02	.250 (6.35)	-	-	-	-	-	-	-	-
	-03	.375 (9.53)	-	-	-	-	-	-	-	-
	572-4864 -01	.219 (5.56)	-	.250 (6.35)	.594 (15.09)	.531 (13.49)	-	-	4-40	6000
2	572-4860 -01	.094 (2.39)	.062 (1.57)	.250 (6.35)	.375 (9.53)	.312 (7.92)	.098 (2.49)	.064 (1.63)	-	6000
	-02	.125 (3.18)	.094 (2.39)	-	-	-	-	-	-	-
	-03	.156 (3.96)	.125 (3.18)	-	-	-	-	-	-	-
	-04	.234 (5.94)	.188 (4.78)	-	-	-	-	-	-	-
	572-4861 -01	.094 (2.39)	.062 (1.57)	.250 (6.35)	.375 (9.53)	.312 (7.92)	.141 (3.58)	.116 (2.95)	-	6000
	-02	.125 (3.18)	.094 (2.39)	-	-	-	-	-	-	-
	-03	.156 (3.96)	.125 (3.18)	-	-	-	-	-	-	-
	-04	.234 (5.94)	.188 (4.78)	-	-	-	-	-	-	-
3	572-4862 -01	.156 (3.96)	-	.250 (6.35)	.375 (9.53)	.312 (7.92)	-	-	4-40	6000
	572-4863 -01	.156 (3.96)	-	.250 (6.35)	.375 (9.53)	.312 (7.92)	-	-	6-32	6000
	572-4868 -01	.219 (5.56)	-	.250 (6.35)	.594 (15.09)	.531 (13.49)	-	-	4-40	6000
	572-4869 -01	.219 (5.56)	-	.250 (6.35)	.594 (15.09)	.531 (13.49)	-	-	6-32	6000