ILLUMINATED VANDAL RESISTANT PUSHBUTTONS

MOMENTARY ACTION, FULLY ILLUMINATED, VANDAL RESISTANT CASE AND BUTTON WITH LEGEND







The LP3-V is an illuminated, vandal-resistant, momentary action switch designed to provide attractive, lighted position indication for applications in harsh environments, where security and reliability are paramount. The series features both aluminum and stainless steel cases watertight to IP68S.


The LP3-V series offers positive tactile feedback and a variety of LED colors available in both flat and domed actuator bezel shapes. Illumination options include ring lit, full illumination and full illumination with legends. Standard offerings include 69 legends per SAE in silver or black. Custom legends, lettering and logos are also available.

This high reliability switch offers the durability and ruggedness our customers have come to expect with the added benefit of illumination. The LP3-V is ideal for marine, off-highway and industrial control applications that require an illuminated switch.

Features:

- Security (aluminum) or vandal resistant (stainless steel) case & button
- Ring or full illumination
- Watertight to IP68S option
- Drop in replacement to the P8-V series of pushbuttons
- **RoHS** compliant

Standard Characteristics/Ratings:	
ELECTRICAL RATINGS:	
Load	Sea Level @ 28VDC or 115VAC, 60/400Hz
Resistive	5A
Inductive	3A
Lamp	1A
Motor	3A
DWV	1000Vrms through switch contacts only
Logic Level	10mA @ 5VDC
Electrical Life:	25,000 cycles, Logic Level 250,000 cycles
Lighting: See LED Voltage Chart in Appendix for more details	
Mechanical Life:	250,000 cycles
Seal:	IP64 or IP68S
Operating Temp Range:	-55°C to +85°C
Operating Force:	2.5 +/- 0.5 lb. or 5.0 +/- 1.0 lb.
Total Travel:	0.080 inches max
Overtravel:	0.010 inches min
MATERIALS:	
Case:	Stainless steel (316) or anodized aluminum alloy
Button:	Ring lit, clear thermoplastic
	Fully illuminated, translucent thermoplastic
Center Cap:	Stainless steel (316) or anodized aluminum alloy
Terminals:	Standard and logic level options available
Mounting Hardware:	Hex or knurl nut, lockwasher and panel gasket when applicable

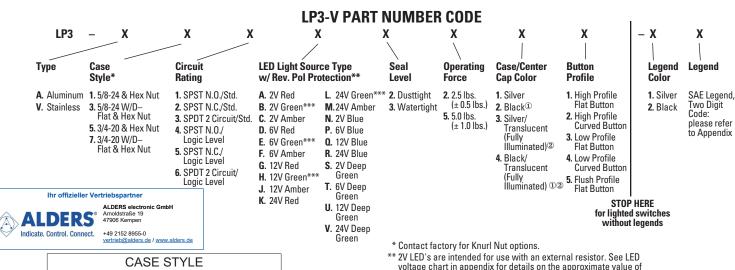

DIMENSION 1 - 4 5 - 8 (BUTTON DIA.) 0.525 0.590 (THREAD) 5/8-24 UNEF-2A 3/4-20 UNEF-2A FLAT 0.718

- For additional LED lighting options, contact factory.
- *** Light source not available with fully illuminated center cap
- ① Only available on LP3-A styles.
- ² Not offered in case styles 5, 6, 7, and 8.

ILLUMINATED VANDAL RESISTANT WITH LEGEND



MOMENTARY ACTION RING ILLUMINATED, VANDAL RESISTANT CASE & BUTTON

