

SHORTER, MOMENTARY ACTION, RING ILLUMINATED, VANDAL RESISTANT CASE & BUTTON

OTTO's LP3S-V series of vandal resistant, momentary action pushbutton switches are a shorter behind panel version of OTTO's LP3-V series. The LP3S-V offers the same case styles, circuit ratings and button types as the LP3-V, but with shorter construction. An excellent choice when space is limited, the LP3S-V switch is designed to provide attractive, lighted position indication for demanding applications, where security and reliability are crucial. The series features both aluminum and stainless steel cases with a watertight to IP68S and IP69K option.

This shorter, yet highly reliable switch offers the durability and ruggedness our customers have come to expect with the added benefit of illumination. The LP3S-V is ideal for marine, off-highway and industrial control applications that require a rugged sealed illuminated switch.

This switch offers positive tactile feedback and a variety of LED colors available in both flat and domed actuator bezel shapes.

Features:

- Security (aluminum) or vandal resistant (stainless steel case & button)
- Shorter behind panel version of OTTO's LP3-V
- Ring illuminated
- Watertight to IP68S and IP69K option
- Variety of button options and LED colors
- Drop in replacement to the LP3-V and P8-V series
- RoHS compliant



Standard Characteristics/Ratings:		
ELECTRICAL RATINGS:		
Load	Sea Level @ 28VDC	Cycles
Resistive	5A	25,000
Inductive	3A	25,000
Lamp	1A	25,000
Motor	3A	25,000
DVV	1000Vrms through switch contacts only	
Logic Level	10mA @ 5VDC	250,000
LIGHTING:		
Light Source Voltage (DC)	Actual Voltage Nominal (DC)	Voltage Max (DC)
2**	2	2.5
12	12	14
24	24	28.6
Mechanical Life:	250,000 cycles	
Seal:	IP64 or IP68S and IP69K	
Operating Temp Range:	-55°C to +85°C	
Operating Force:	2.5 +/- 0.5 lb. or 4.0 +/- 1.0 lb.	
Total Travel:	0.080 inches +/- 0.015	
Overtravel:	0.010 inches min	
MATERIALS:		
Case:	Stainless steel (316) or anodized aluminum alloy	
Button:	Thermoplastic	
Center Cap:	Stainless steel (316) or anodized aluminum alloy	
Mounting Hardware:	Hex nut, lockwasher and panel seal gasket (watertight only)	

Votre distributeur officiel



ALDERS
Indicate. Control. Connect.

ALDERS electronic GmbH
Arnoldstraße 19
47906 Kempen - Allemagne

+33 3 88064677
+33 6 33389393
catherine.sturm@alders.fr / www.alders.fr

LP3S-V PART NUMBER CODE

	LP3S	-	X	X	X	X	X	X	X
Type	Case Style*		Circuit Rating		Light Source Type** w/ Rev. Pol Protection	Seal Level	Operating Force	Case/Center Cap Color	Button Profile
A. Aluminum	1. 5/8-24 & Hex Nut		1. SPST N.O./Std.		A. 2V Red LED	2. Dusttight	2. 2.5±0.5 lbs.	1. Silver	1. High Profile Flat Button
V. Stainless	3. 5/8-24 W/D-Flat & Hex Nut		3. SPDT 2 Circuit/Std.		B. 2V Green LED	3. Watertight	4. 4.0±1.0 lbs.	2. Black***	2. High Profile Curved Button
	5. 3/4-20 & Hex Nut		4. SPST N.O./Logic Level		C. 2V Amber LED				3. Low Profile Flat Button
	7. 3/4-20 W/D-Flat & Hex Nut		6. SPDT 2 Circuit/Logic Level		G. 12V Red LED				4. Low Profile Curved Button
					H. 12V Green LED				5. Flush Profile Flat Button
					J. 12V Amber LED				
					K. 24V Red LED				
					L. 24V Green LED				
					M. 24V Amber LED				
					N. 2V Blue LED				
					Q. 12V Blue LED				
					R. 24V Blue LED				
					S. 2V Deep Green LED				
					U. 12V Deep Green LED				
					V. 24V Deep Green LED				
					W. 2V White LED				
					X. 12V White LED				
					Y. 24V White LED				

*For Knurl nut options, consult factory

CASE STYLE		
DIMENSION (BUTTON DIA.)	1 & 3	5 & 7
(THREAD)	0.525	0.590
FLAT	5/8-24 UNEF-2A	3/4-20 UNEF-2A
	0.594	0.718




**2V LED's are intended for use with an external resistor. See LED voltage chart in appendix for details on the approximate value of the resistor.
For additional LED lighting options, contact factory.

*** Only available on LP3S-A styles.




ILLUMINATED VANDAL RESISTANT PUSHBUTTONS

SHORTER MOMENTARY ACTION RING ILLUMINATED, VANDAL RESISTANT CASE & BUTTON




LP3S-XXXXXXX1
High Profile Flat Button

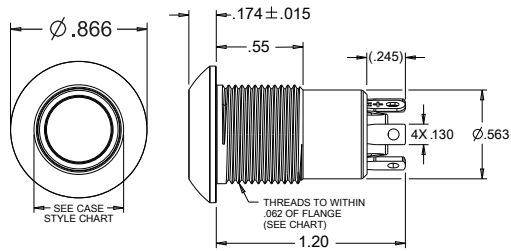




LP3S-XXXXXXX2
High Profile Curved Button

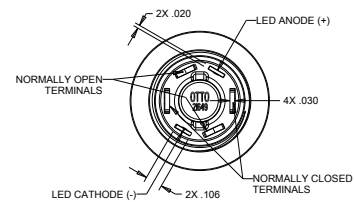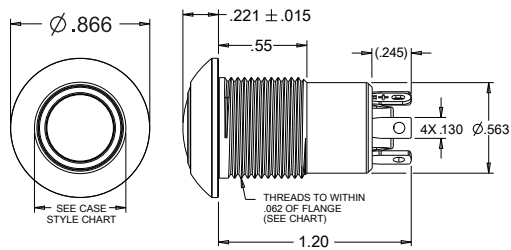





LP3S-XXXXXXX3
Low Profile Flat Button

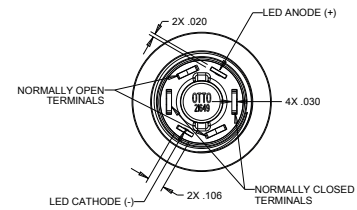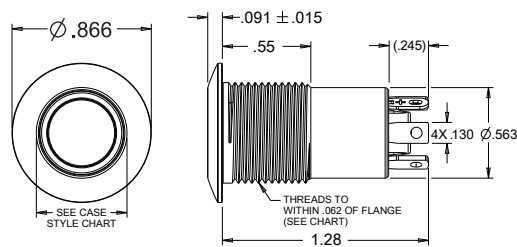

LP3S-XXXXXXX4
Low Profile Curved Button

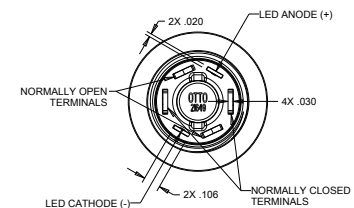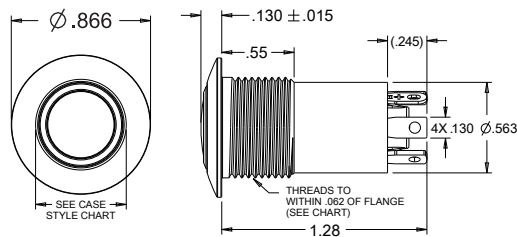

LP3S-XXXXXXX5
Flush Profile Flat Button

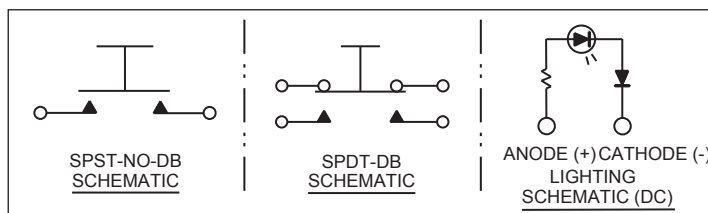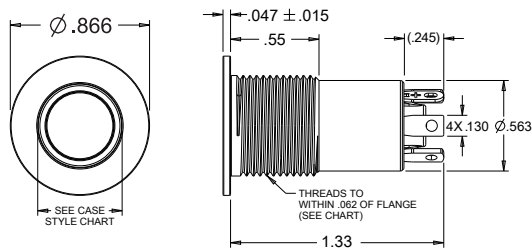

PUSHBUTTON SWITCHES