

REDUCED DEAD BREAK, SNAP-ACTION, SINGLE BREAK, SUBMINIATURE, TWO WIDTHS

The B2D is a single break, snap action, subminiature basic switch with reduced dead break. It is designed for pressure transducers, level sensors and other applications where the difference between the breaking of the first circuit and the making of the second circuit needs to be as close as possible to zero.

As multi-circuit switches change from one circuit to another, there is always a small amount of time or distance where the actuator is depressed and the switch is not connected to either circuit. Dead break is the distance of actuator travel to cause the switch to transfer from one circuit to the other. OTTO's B2D closes that gap quicker than a traditional basic switch. It will outperform most switches when the actuator is being depressed very slowly, or when it is important for the application to minimize the time the switch is not connected to either circuit.


There are 13 terminal styles which include single turret solder style, double turret solder style, Quick Connect, PC pins and wires.

The B2D shares the same dimensions as OTTO's B2 basic switch, is a drop-in replacement and is available with or without lever actuators.

Able to withstand high vibration, OTTO's B2D is ideal for pressure sensing and level sensing in aerospace, off-road and marine applications.


## Features:

- Choice of 0.156" and 0.200" wide models
- Logic level switching capability
- Choice of 13 standard terminal styles or wire leads
- Lever actuators available
- Momentary action
- RoHS compliant

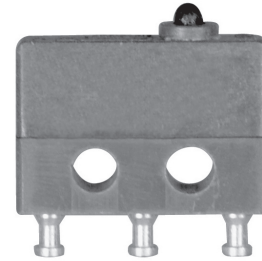

B2D Standard Characteristics/Ratings:		
<b>ELECTRICAL RATINGS:</b>		
<b>Load</b>	<b>Sea Level @ 28VDC or 115VAC, 60Hz</b>	<b>50,000 feet @ 28VDC</b>
Resistive	2A	1A
Inductive	1A	0.5A
DWV	1000Vrms	400Vrms
Logic Level	10mA at 5VDC	10mA at 5VDC
<b>Electrical Life:</b>	50,000 cycles	
<b>Mechanical Life:</b>	50,000 cycles	
<b>Seal:</b>	Unsealed	
<b>Operating Temp Range:</b>	-55°C to +85°C	
<b>Operating Force:</b>	10 oz max	
<b>Release Force:</b>	1.0 oz min	
<b>Operate Point:</b>	0.320 +/- 0.015 inches from mounting holes	
<b>Overtravel:</b>	0.004 inches min	
<b>Movement Differential:</b>	0.003 inches max	
<b>Pretravel:</b>	0.020 inches max	
<b>Initial Dead Break:</b>	0.0004 inches max	
<b>MATERIALS:</b>		
<b>Cover:</b>	Thermoplastic, blue	
<b>Button:</b>	Thermoplastic, black	
<b>Terminal Hardware:</b>	None provided	
<b>Mounting Hardware:</b>	None provided	

## B2D PART NUMBER CODE

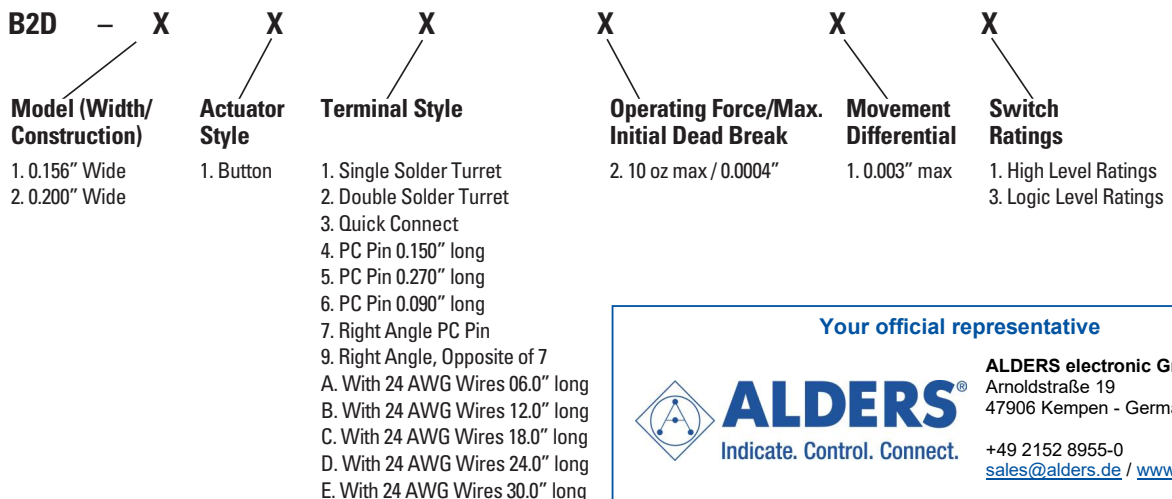

**Your official representative**

**ALDERS**<sup>®</sup>  
Indicate. Control. Connect.


**ALDERS electronic GmbH**  
Arnoldstraße 19  
47906 Kempen - Germany  
+49 2152 8955-0  
[sales@alders.de](mailto:sales@alders.de) / [www.alders.de](http://www.alders.de)

# B2 BASICS WITH REDUCED DEAD BREAK



**B2D**  
BASIC SWITCHES

REDUCED DEAD BREAK, SINGLE BREAK, SNAP-ACTION, SUBMINIATURE, TWO WIDTHS




## BASIC SWITCH (APPLIES TO ALL SWITCHES IN THIS DRAWING)

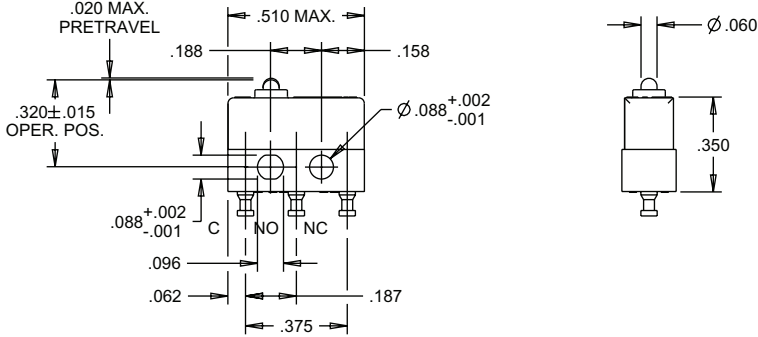


### MODEL (WIDTH/CONSTRUCTION) 1 0.156" WIDE




### MODEL (WIDTH/CONSTRUCTION) 2 0.200" WIDE

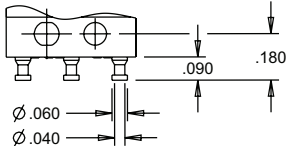


**TERMINAL STYLE 1  
SINGLE SOLDER TURRET**

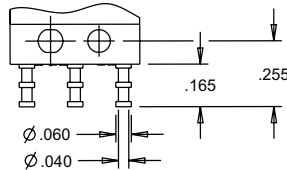


**TERMINAL STYLE 2  
DOUBLE SOLDER TURRET**

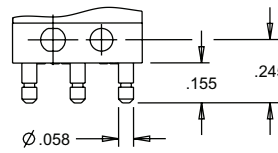


**TERMINAL STYLE 3  
QUICK CONNECT  
MATES WITH AMP .058" RECEPTACLES**

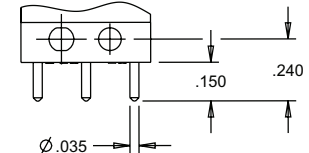


**TERMINAL STYLE 4  
PRINTED CIRCUIT PIN 0.150" LONG**

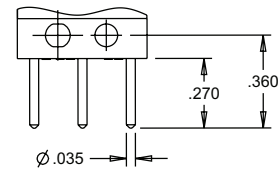


**TERMINAL STYLE 5  
PRINTED CIRCUIT PIN 0.270" LONG**

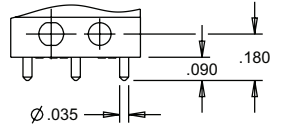


**TERMINAL STYLE 6  
PRINTED CIRCUIT PIN 0.090" LONG**




SWITCH WIDTH	DIM. "A"
.156	.110
.200	.085

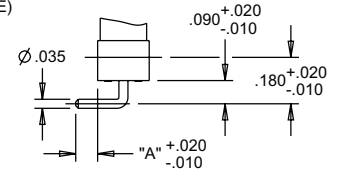


**TERMINAL STYLE 7  
RIGHT ANGLE PRINTED CIRCUIT PIN**



SWITCH WIDTH	DIM. "A"
.156	.110
.200	.085

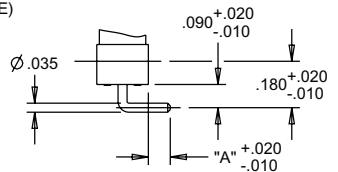

**TERMINAL STYLE 9  
RIGHT ANGLE, OPPOSITE OF 7**

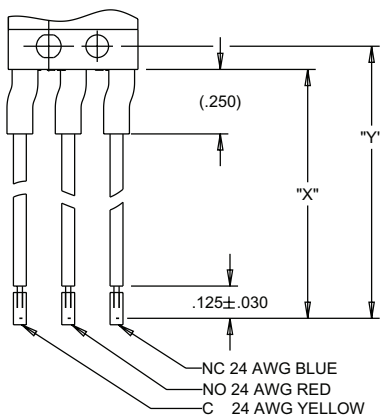

**WIRE TERMINAL STYLES**

### WIRE LENGTH FOR A, B, C, D and E

WIRE LENGTH CODE	DIM. "X"	DIM. "Y"
A	06.00 ± .38	06.09 ± .38
B	12.00 ± .50	12.09 ± .50
C	18.00 ± .50	18.09 ± .50
D	24.00 ± .50	24.09 ± .50
E	30.00 ± .75	30.09 ± .75