


# MINIATURE BASIC SWITCHES

DOUBLE BREAK, SNAP-ACTION COMMERCIAL & MILITARY GRADES, MINIATURE

B5 series basic switches are miniature in size and feature up to 10 amps switching capability of 100,000 cycles. Mechanical life is one million cycles.

The molded housing is rugged and structurally stable. The terminals are sealed against solder flux entering the switch and are bright acid tin plated for excellent solderability.



Solder Terminal Style



## Features:

- Up to 10 amps switching capability
- High contact pressure
- Precision operating points
- Button accepts actuation directly from cam
- Constructed in accordance with MIL-PRF-8805/7
- Available in Commercial & Military grades
- Choice of four standard terminal styles or wire leads
- UL recognized
- B5-21141 qualified to MS27217-1
- Momentary action
- RoHS compliant

### Standard Characteristics/Ratings:

#### ELECTRICAL RATINGS:

Circuitry	Load	Sea Level @ 28VDC	70,000 feet @ 28VDC	Sea Level @ 115VAC, 60Hz
SPNO-DB & SPNC-DB	Resistive	10A	10A	10.1A
	Inductive*	7.5A	3.5A	5A
	Lamp	1A	N/A	3A
SPDT-DB	Resistive	10A	10A	10.1A
2 Circuit	Inductive*	5A	2A	5A
	Lamp	3A	N/A	1.5A
SPDT	Resistive	10A	10A	10.1A
	Inductive*	3A	1.5A	N/A
	Lamp	3A	N/A	N/A


\*L/R = 0.026

<b>DWV</b>	1000Vrms	400Vrms
------------	----------	---------

<b>Electrical Life:</b>	100,000 cycles
<b>Mechanical Life:</b>	1,000,000 cycles
<b>Seal:</b>	Unsealed
<b>Operating Temp Range:</b>	-65°C to +125°C
<b>Operating Force:</b>	5 oz, +3/-2 oz or 6 oz max or 3 oz min
<b>Release Force:</b>	2 oz min
<b>Operate Point:</b>	0.406 +/- 0.010 inches from mounting holes
<b>Overtravel:</b>	0.012 inches min
<b>Movement Differential:</b>	0.020 +/- 0.005 inches
<b>Pretravel:</b>	0.050 inches max

<b>MATERIALS:</b>	
<b>Case:</b>	Thermoset, blue
<b>Cover:</b>	Thermoset, blue
<b>Button:</b>	Thermoplastic, black
<b>Terminals:</b>	Brass with bright acid tin plating
<b>Contacts:</b>	Stationary: Silver with gold Moveable: Silver with gold
<b>Terminal Hardware:</b>	None provided, optional wires
<b>Mounting Hardware:</b>	None provided

### B5 PART NUMBER CODE

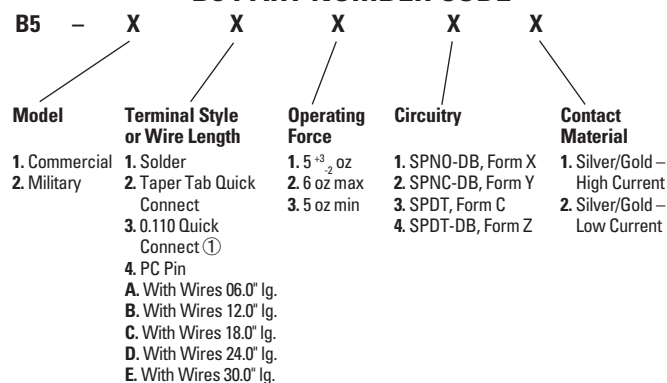

① Mates with AMP Series 110 receptacles.

Votre distributeur officiel



**ALDERS**  
Indicate. Control. Connect.

ALDERS electronic GmbH  
Arnoldstraße 19  
47906 Kempen - Allemagne

+33 3 88064677  
+33 6 33389393  
[catherine.sturm@alders.fr](mailto:catherine.sturm@alders.fr) / [www.alders.fr](http://www.alders.fr)

# MINIATURE BASIC SWITCHES

DOUBLE BREAK, SNAP-ACTION COMMERCIAL & MILITARY GRADES, MINIATURE

