



Cast from aluminum alloy, the G2 Commander Grip is a rugged industrial control grip suitable for demanding applications. The standard G2 Commander Grip offers nine different faceplate configurations that include pushbutton, toggle, transducer, split trim and Hall effect switches. Thousands of custom faceplate configurations are possible. The grip body has 10 possible switch location options.

The G2 Commander Grip is suitable for use in military, aerospace and industrial applications, and is the ideal solution where durability and dependability are required.

Features:

- **Standard design eliminates the need for tooling charges**
- **Available as a fixed grip or can be mounted on an OTTO Hall effect joystick**
- **Various mounting & termination options available**
- **Nine standard faceplate configurations that collectively include OTTO's T3, T4 and T5 toggle switches, P4, P7 and P9 pushbutton switches, K1 rocker switches, SPT split trim switches, J2 transducer switches, FG flip guards, and HTWM, HTL and HTLT Hall effect controls.**
- **Thousands of custom faceplate configurations possible that can accommodate virtually all OTTO pushbutton, rocker, toggle, trim, transducer and thumbwheel switches**
- **Operator presence and trigger options**
- **USB output option**
- **Tested to withstand a 265 lb. load**
- **Grip sealed to IP68S (subject to change based on switch choice)**



Commander Grip
with Brow Shown

Standard Physical Characteristics:

MATERIALS:

Handle:	Aluminum, investment cast, A356-T6
Faceplate:	Aluminum, wrought, 6061-T6
Wires (Flying Leads):	22 AWG per M22759/11-22
Wires (USB Cable)	USB 2.0 type A connector

G2 COMMANDER GRIP PART NUMBER CODE

G2	-	X	X	XX	X	X	X	X	X	X	X
Trigger With Guard	Operator Presence	Faceplate Option*	Grip Head Brow	Grip Head Switches Back	Grip Head Switches Top	Grip Head Switches Side*	Handle Switches	Cable Output	Paint		
1. None 2. Yes	1. None 2. Yes	AA AB AC AD AE AF AG AH AJ	1. None 2. Yes	1. None 2. One P7 Back Left 3. One P7 Back Right 4. Two P7's - Back Left & Right	1. None 2. One P7 Top Left 3. One P7 Top Right 4. Two P7's - Top Left & Right	1. None 2. One P7 Side Left 3. One P7 Side Right 4. Two P7's - Side Left & Right	1. None 2. One P7 Side Left 3. One P7 Side Right	1. Flying Leads 3' 2. USB Cable 5'***	1. Polyurethane Per MIL-DTL-53039, Color Black #37038 Per FED-STD-595 2. Powder Coat, Color Black #37038 Per FED-STD-595		

* See Faceplate Configurations on Pages 33-34.

Faceplate options AB, AD and AH not available with grip head switches side, option 2 & 4.

Faceplate options AE and AF not available with grip head switches side, option 3 & 4.


***Faceplate options AC and AF not available with USB Cable Output option.

G2 COMMANDER GRIPS


G2
COMMANDER
GRIPS

RUGGED DESIGN

STANDARD DIMENSIONS

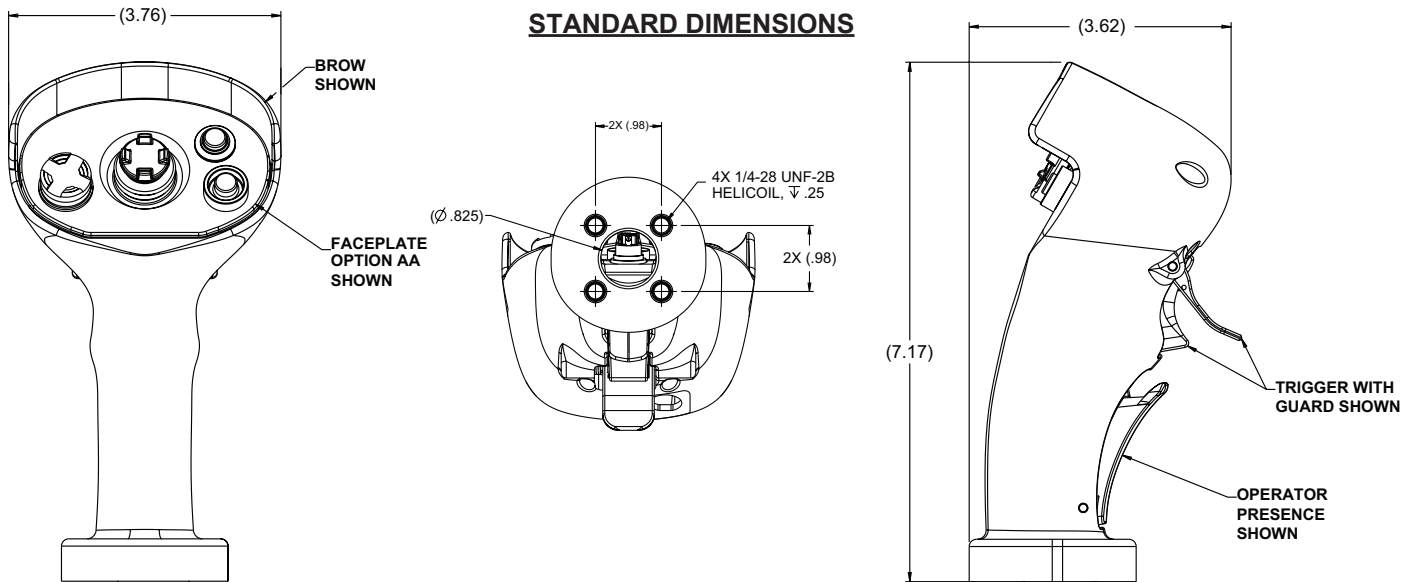


GRIP HEAD AND HANDLE SWITCH OPTIONS


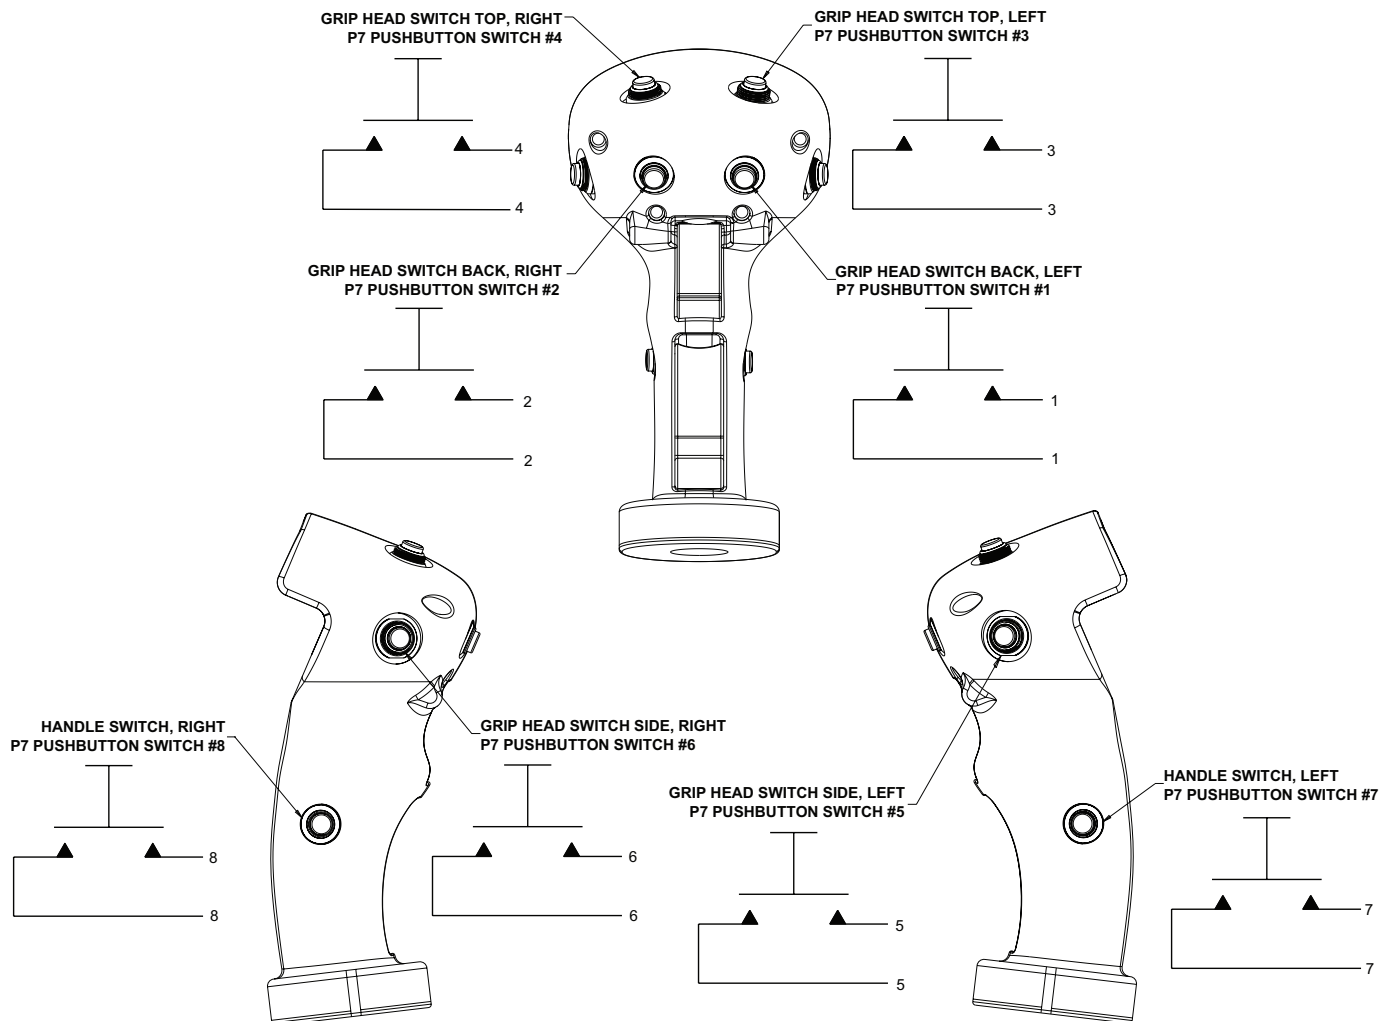


TRIGGER, BROW AND OPERATOR PRESENCE OPTIONS

TRIGGER OPTIONS




NO TRIGGER

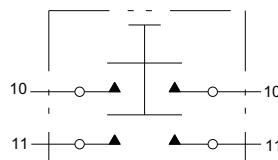



P4 PUSHBUTTON SWITCH

TRIGGER WITH GUARD

OPERATOR PRESENCE OPTIONS

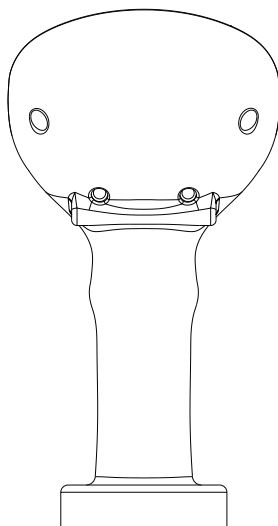


NO OPERATOR PRESENCE

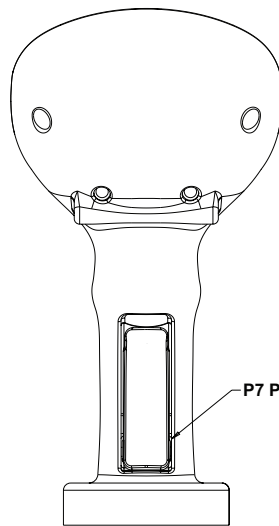


P7 PUSHBUTTON SWITCH #9

OPERATOR PRESENCE

BROW OPTIONS




NO BROW



WITH BROW

STANDARD CONFIGURABLE FACEPLATE OPTIONS

FACEPLATE OPTIONS

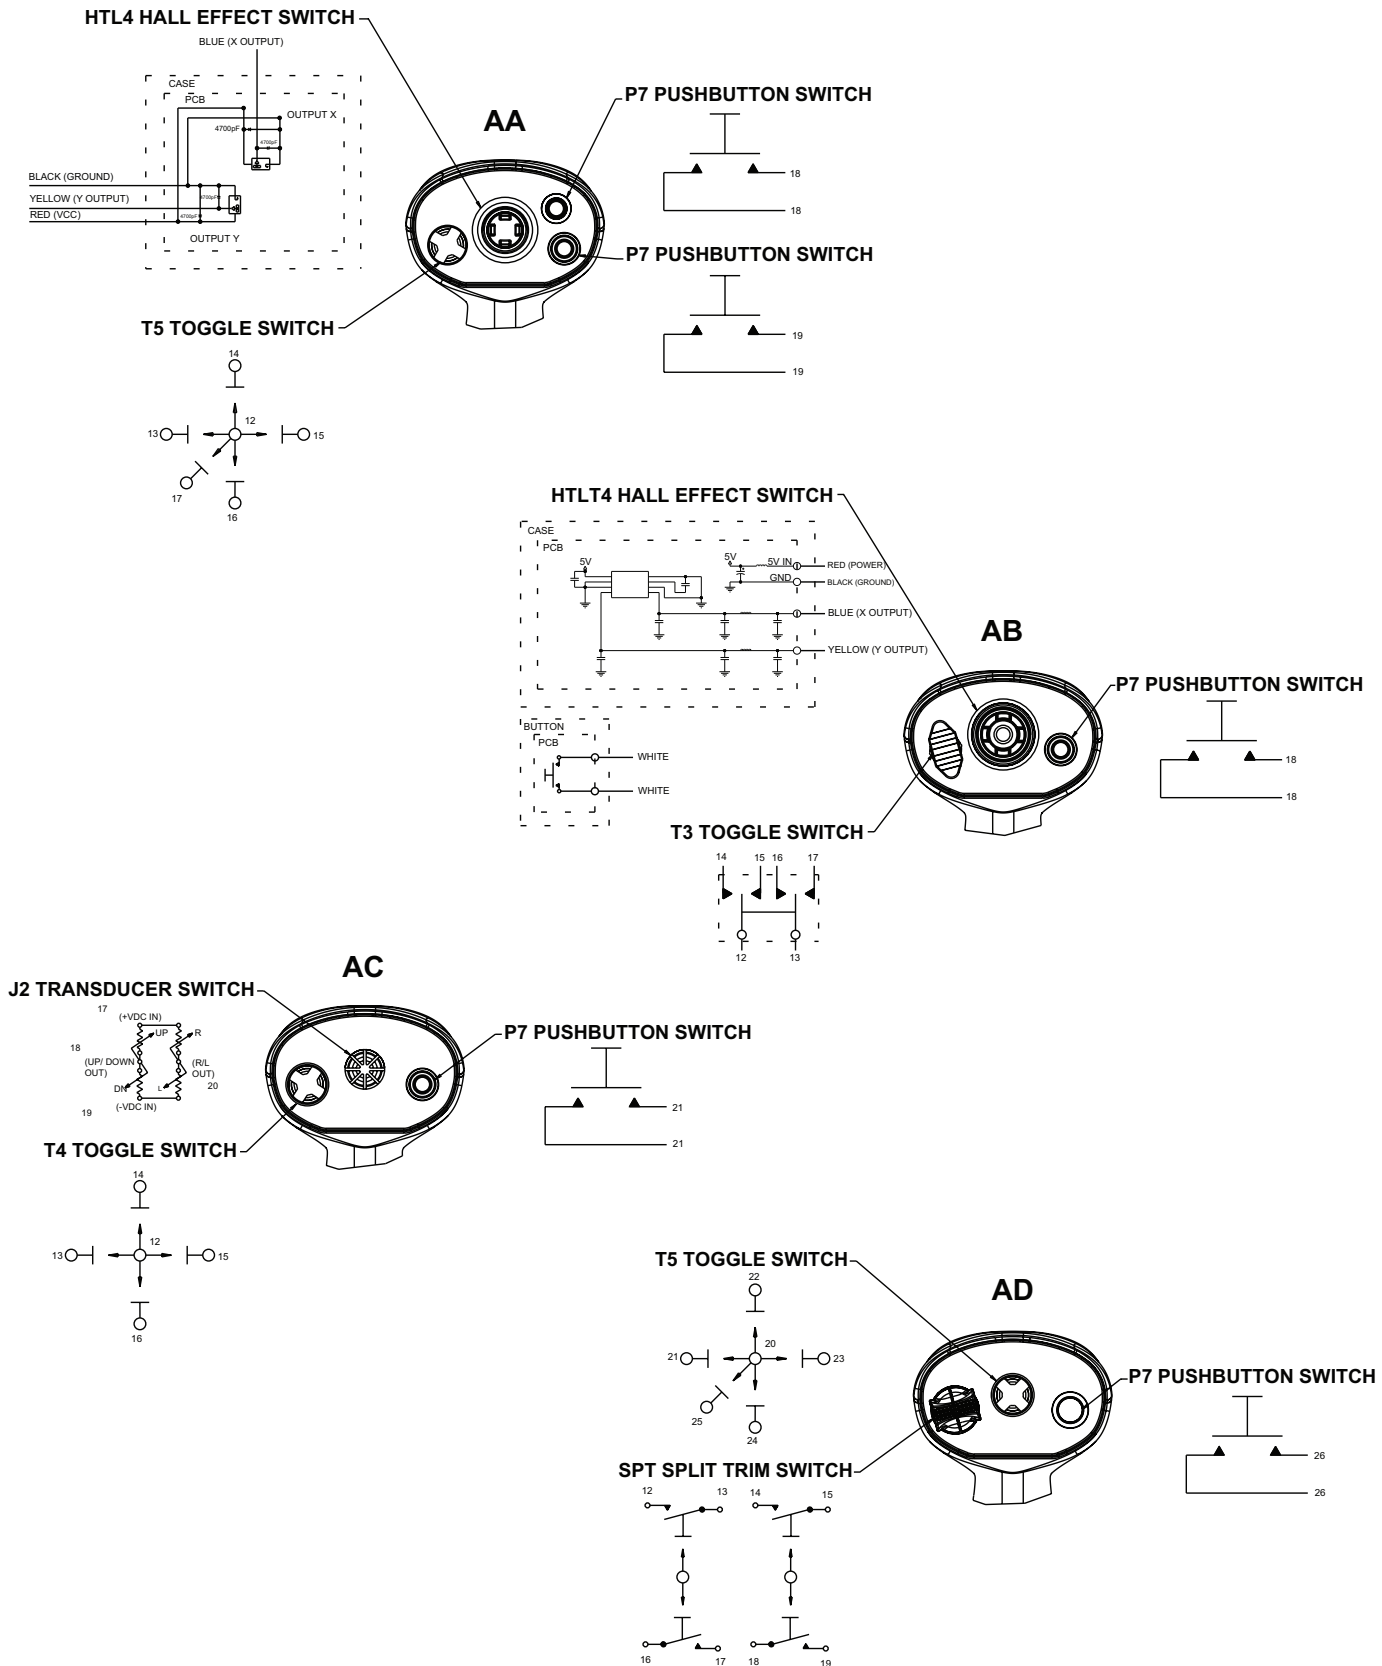

STANDARD CONFIGURABLE FACEPLATE OPTIONS

FACEPLATE OPTIONS

