

PROPORTIONAL OUTPUT THUMBWHEEL

HTWS
SUBMINIATURE
THUMBWHEEL

SUBMINIATURE PROPORTIONAL OUTPUT THUMBWHEEL WITH OPTIONAL SEAT BOOT

The HTWS Hall Effect Proportional Output Thumbwheel is a smaller version of OTTO's HTW and HTWM. It is a spring return-to-center, single axis thumbwheel that provides a linear change in voltage output corresponding to actuator movement in either direction from center. Its smaller size makes it a perfect choice for use in grips or panels where space is limited. The HTWS is available with eight output options, including increasing and decreasing voltage output from the center position to the full travel position and single or dual (redundant) outputs.

The HTWS snaps into a 0.895" x 0.420" panel opening. Electronics are sealed to IP68S, and the optional sealing boot is offered for above panel mechanical protection against dust, sand, and water ingress. The HTWS offers a three million cycle rotational life, operate force options and excellent EMI /RFI immunity. It is available with flying wire leads or pin connection.

Features:

- 8 output options
- Spring return-to-center single axis actuator
- Installs into 0.895" x 0.420" panel opening
- Integrated snap-in retaining feature
- Sealing boot option
- 3 million cycle rotational life
- Electronics sealed to IP68S
- Excellent EMI/RFI immunity
- Flow through design
- RoHS compliant



Standard Characteristics/Ratings:				
ELECTRICAL RATINGS: Rated at 5V @ 25°C Load = 1mA (4.7KΩ)				
Electrical	Units	Min	Typ	Max
Supply Voltage	VDC	4.5	5.0	5.5
Output Voltage	VDC	-25	N/A	+25
Tolerance at Center	@ 5V Vcc			
Output Voltage	VDC	-25	N/A	+25
Tolerance Full Travel	@ 5V Vcc			
Supply Current Per Sensor	mA	N/A	N/A	20
B=0, Vcc=5V, Iout=0				
MECHANICAL:				
Mechanical Life:	3,000,000 full forward to full back (button styles 1, 2) 1,000,000 full forward to full back (button style 3)			
Max Allowable Radial Load:	15.0 lbs. (button styles 1, 2); 10.0 lbs (button style 3)			
ENVIRONMENTAL:				
Operating Temp Range:	-40°C to +85°C			
Humidity:	96% RH, 70°C, 96 hours			
Vibration:	Per MIL-810F minimum integrity			
Electronics Enclosure:	IP58S (button styles 1, 2) IP68S (button style 3)			
Mechanical Enclosure:	Unsealed (button styles 1, 2)			
Mechanical Enclosure:	IP68S (button style 3) (above panel)			
Mechanical Enclosure:	Unsealed (button style 3) (below panel)			
RFI:	ISO 11452-2 & ISO 11452-4 (Single Output) SAE J1113-21 & SAE J1113-22 (Dual Output)			
EMI:	ISO 11452-8 (Single Output) SAE J1113-22 (Dual Output)			
ESD (Powered & Un-Powered):	ISO 10605 (Single Output) SAE J1113-13 (Dual Output)			
MATERIALS:				
Button Top:	Thermoplastic			
Bezel:	Thermoplastic			
Boot:	Silicone Rubber, Black			

Ihr offizieller Vertriebspartner



ALDERS
Indicate. Control. Connect.

ALDERS electronic GmbH
Arnoldstraße 19
47906 Kempen

+49 2152 8955-0
vertrieb@alders.de / www.alders.de

HTWS PROPORTIONAL THUMBWHEEL PART NUMBER CODE

HTWS	X	X**	X	X	X	X****	X*****
Travel	Output 1	Output 2	Operate Force	Button Style	Termination	Bezel Color	Button Color
1. +/-30°	A. 2.5 +/- 2.0VDC	NONE	1. 5 oz. typ.	1. Knurled Wheel*	A. Wire Leads, 22 AWG UL 1569 (Single Output Only)	1. Red	1. Red
2. +/-45°*	B. 2.5 +/- 2.0VDC	2.5 +/- 2.0VDC	2. 8.5 oz. typ.	2. Paddle Wheel	B. Wire Leads, 22 AWG UL 1569, (Dual Output Only)	2. Black	2. Black
	C. 2.5 +/- 2.0VDC	2.5 +/- 2.0VDC	3. 12 oz. typ.	3. Paddle Wheel with Seal Boot***			3. Orange
	D. 2.5 +/- 1.5VDC	NONE					4. Yellow
	E. 2.5 +/- 1.5VDC	2.5 +/- 1.5VDC					5. Green
	F. 2.5 +/- 1.5VDC	2.5 +/- 1.5VDC					6. Blue
	G. 1.0 - 4.0VDC	1.0 - 4.0VDC					7. Violet
	H. 0.5 - 4.5VDC	0.5 - 4.5VDC					8. Gray
							9. White

* Not available with Operate Force selection "3"

** Outputs are from the center position to the full travel position in each direction. Options "A" "B" "C" "D" "E" "F" provide increasing voltage in direction 1 and decreasing voltage in direction 2 from a single output. Option "G" and "H" provide increasing voltages in both directions from two separate outputs. Option "B" and "E" provide redundant output 2 which duplicates output 1. Option "C" and "F" provide redundant output 2 which is inverse of output 1.



*** Available with Operate Force selection "3" only

**** Contact Factory for additional bezel color choices.


***** Minimums may apply to colors other than red and black.

SUBMINIATURE PROPORTIONAL OUTPUT THUMBWHEEL WITH OPTIONAL SEAT BOOT




HTWS Paddle Wheel Style Shown

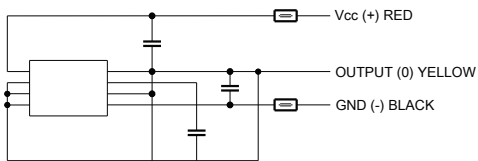

SINGLE OUTPUT SCHEMATIC

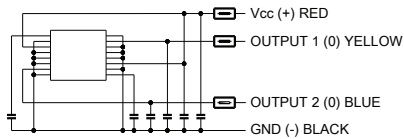


DUAL OUTPUT
COMMON POWER & GROUND
SCHEMATIC


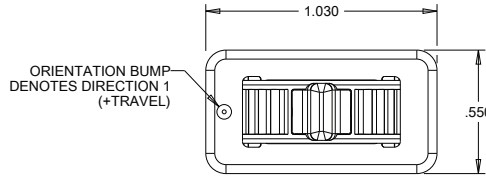
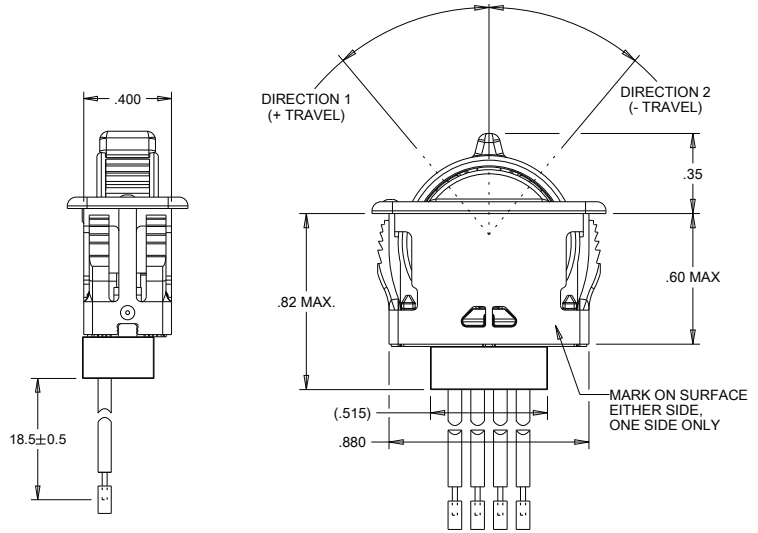


NOT ALL WIRES ARE PRESENT
IN ALL OUTPUT CONFIGURATIONS

MOUNTING:
RECOMMENDED PANEL THICKNESS: 0.150 OPTIMUM THICKNESS

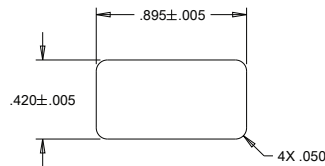


HTWS Paddle Wheel with Boot Style Shown

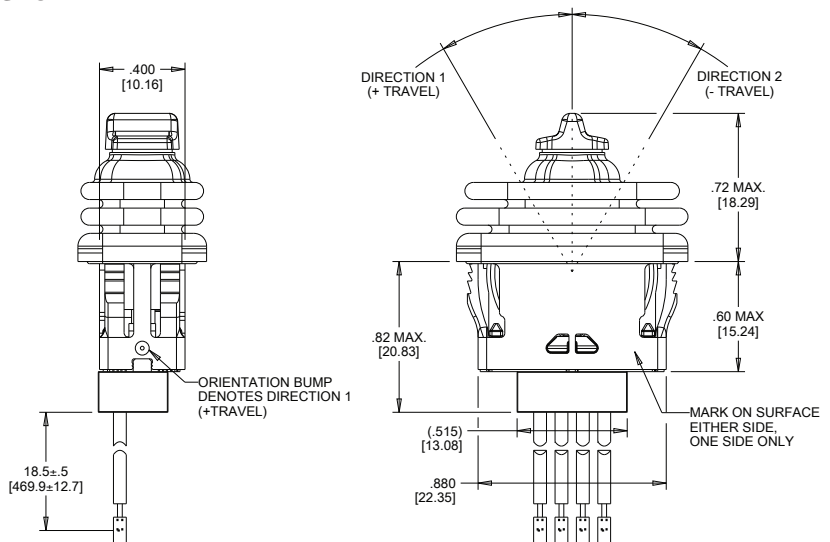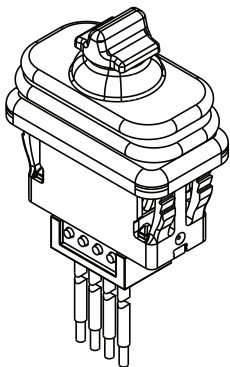


PROPORTIONAL OUTPUT THUMBWHEEL

SUBMINIATURE PROPORTIONAL OUTPUT THUMBWHEEL WITH OPTIONAL SEAT BOOT


OPTION A

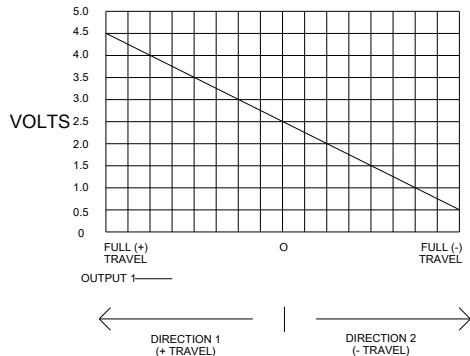


OPTION B

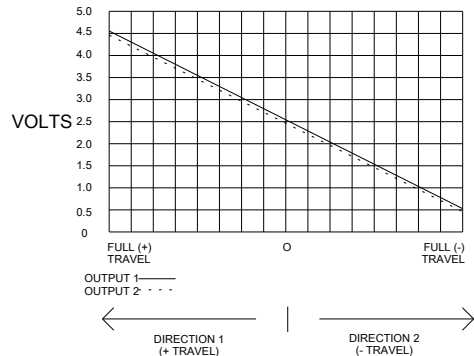


OPTION C

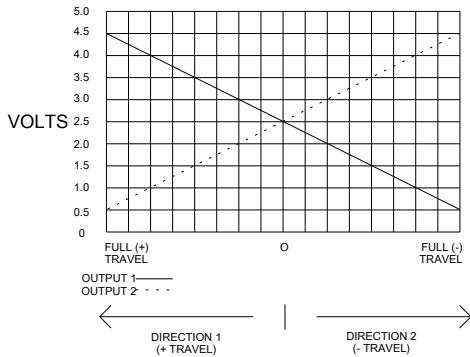


OPTION D

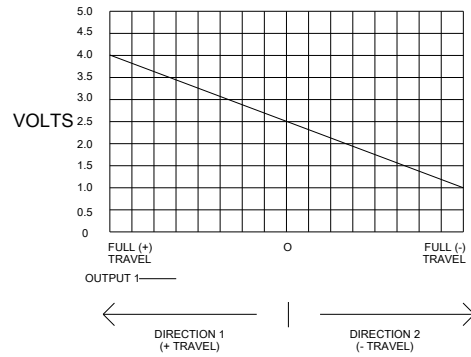


OPTION E

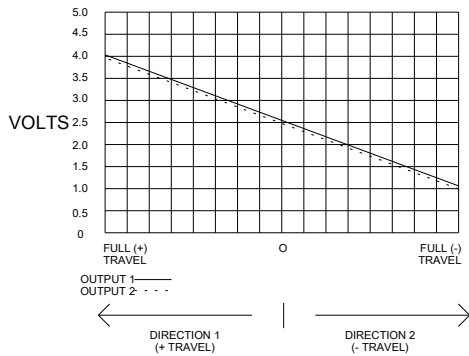

OPTION F

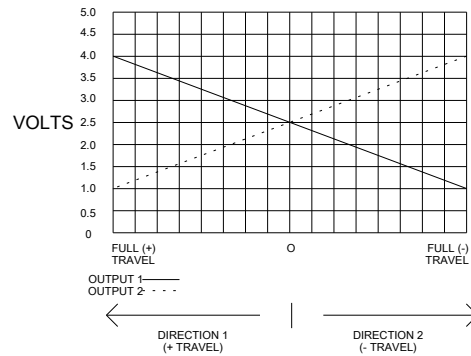

OPTION G

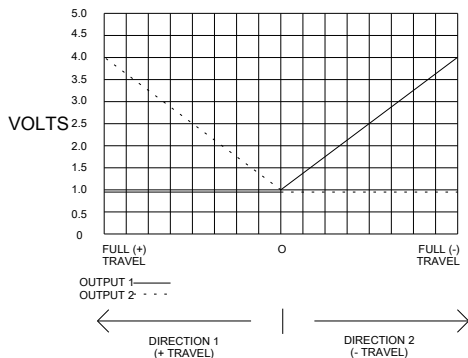

OPTION H

