Ihr offizieller Vertriebspartner ALDERS electronic GmbH Arnoldstraße 19 47906 Kempen · Germany

2 +49 2152 8955-0

🔀 vertrieb@alders.de

SLIDE SWITCH

SLIDE **SWITCH**

SLIDE SWITCHES

COMMERCIAL & MILITARY GRADES



Flush Button Style




Features:


- Single & double pole, double throw • switch configuration
- Logic level rating available with gold plate • contacts & terminals
- 3-position center OFF with momentary or • maintained switch action in any combination
- Dusttight to MIL-PRF-8805 Design 2 •
- **Raised & flush button contours available** •
- **Choice of button color**
- FAA/PMA available (contact factory)
- **RoHS compliant**

Standard Characteristics/Ratings:	
ELECTRICAL RATINGS:	
Load	Sea Level @ 28VDC or 115VAC, 60/400Hz
Resistive	5A
Inductive	3A
Lamp	1A
DWV	1050Vrms
Logic Level	10mA @ 5VDC
Electrical Life:	100,000 cycles
Mechanical Life:	100,000 cycles
Seal:	Dusttight per MIL-PRF-8805 Design 2
Operating Temp Range:	-55°C to +85°C
Operating Force:	24 oz +/- 10 oz
Return Force:	10 oz +8 oz/-3 oz to center from maintained position
Total Travel:	0.120 inches max two directions
Overtravel:	0.010 inches min
MATERIALS:	
Case:	Thermoplastic
Button:	Thermoplastic
Terminals:	Copper with silver Gold over silver for logic level
Terminal Hardware:	None provided
Mounting Hardware:	Hex nut and lockwasher

NOTE: () denotes momentary action.

SL PART NUMBER CODE

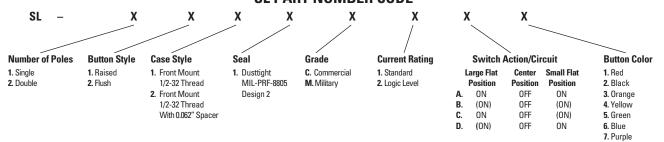

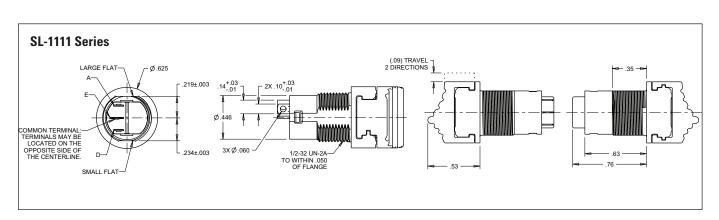

8. Gray 9. White

SLIDE SWITCH

SLIDE SWITCH

COMMERCIAL & MILITARY GRADES

