


SOLDER TERMINALS - PTFE INSULATED, PRESS MOUNT

Dimensions in inches (mm)
See page 91 for Mounting Instructions

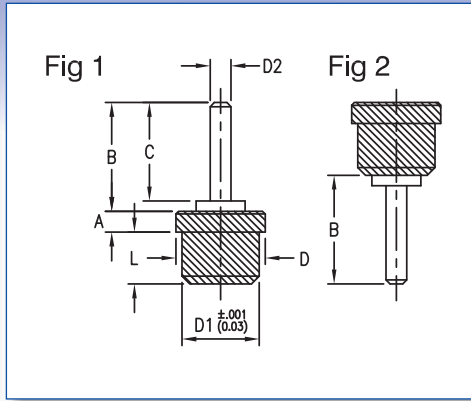

How to order code

571 - 4XXX - XX - XX - 19

Basic Part No. | Insulator Colour | Terminal Finish

Material Code Table		
Component	Material	RoHS
Insulator	PTFE	✓
Terminal	Brass	✓

Finish Code Table		
Dash No.	Terminal Finish	RoHS
-01	Silver	✓
-05	Electro-Solder	X

Insulation Colour Code Table	
Dash No.	Colour
-19	White

Fig.	Basic Part No.	L	Board Thickness	A	B	C	D	D1	D2	Mtg. Hole Diameter	Capacitance (pF)	Flashover VRMS at Sea Level
1	571-4029 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.210 (5.33)	.190 (4.83)	.172 (4.37)	.149 (3.78)	.040 (1.02)	.136 (3.45)	0.5	3000
	-02	.125 (3.18)	.031 (0.79) to .085 (2.16)								0.5	3000
	-03	.165 (4.19)	.031 (0.79) to .125 (3.18)								0.5	3000
	-04	.250 (6.35)	.031 (0.79) to .210 (5.33)								0.5	3000
	571-4030 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.094 (2.39)	.210 (5.33)	.190 (4.83)	.172 (4.37)	.149 (3.78)	.040 (1.02)	.136 (3.45)	0.5	4200
	-02	.125 (3.18)	.031 (0.79) to .085 (2.16)								0.5	5500
	-03	.165 (4.19)	.031 (0.79) to .125 (3.18)								0.5	5500
	-04	.250 (6.35)	.031 (0.79) to .210 (5.33)								0.5	5500
	571-4037 -01	.060 (1.52)	.016 (.041) only	.040 (1.02)	.210 (5.33)	.190 (4.83)	.172 (4.37)	.149 (3.78)	.040 (1.02)	.136 (3.45)	0.5	3000
	571-4043 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.450 (11.43)	.430 (10.92)	.172 (4.37)	.149 (3.78)	.040 (1.02)	.136 (3.45)	0.6	2500
	-02	.125 (3.18)	.031 (0.79) to .085 (2.16)								0.6	2500
	571-4133 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.320 (8.13)	.300 (7.62)	.250 (6.35)	.216 (5.49)	.040 (1.02)	.203 (5.16)	0.5	3000
	571-4134 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.450 (11.43)	.430 (10.92)	.250 (6.35)	.216 (5.49)	.040 (1.02)	.203 (5.16)	0.5	3500
	571-4135 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.610 (15.49)	.590 (14.99)	.250 (6.35)	.216 (5.49)	.040 (1.02)	.203 (5.16)	0.5	3000
2	571-4031 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.210 (5.33)	.190 (4.83)	.172 (4.37)	.149 (3.78)	.040 (1.02)	.136 (3.45)	0.5	3500
	-02	.125 (3.18)	.031 (0.79) to .085 (2.16)								0.5	4000
	-03	.165 (4.19)	.031 (0.79) to .125 (3.18)								0.5	4000
	-04	.250 (6.35)	.031 (0.79) to .210 (5.33)								0.5	6000
	571-4046 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.450 (11.43)	.430 (10.92)	.172 (4.37)	.149 (3.78)	.040 (1.02)	.136 (3.45)	0.5	3000
	-02	.125 (3.18)	.031 (0.79) to .085 (2.16)								0.5	3500
	571-4072 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.450 (11.43)	.430 (10.92)	.188 (4.78)	.172 (4.37)	.040 (1.02)	.158 (4.01)	0.5	3500
	571-4073 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.610 (15.49)	.590 (14.99)	.188 (4.78)	.172 (4.37)	.040 (1.02)	.158 (4.01)	0.5	3000
	571-4109 01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.210 (5.33)	.190 (4.83)	.188 (4.78)	.172 (4.37)	.040 (1.02)	.158 (4.01)	0.5	3000
	571-4136 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.320 (8.13)	.300 (7.62)	.250 (6.35)	.216 (5.49)	.040 (1.02)	.203 (5.16)	0.5	3500
	571-4137 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.450 (11.43)	.430 (10.92)	.250 (6.35)	.216 (5.49)	.040 (1.02)	.203 (5.16)	0.5	3000
	571-4138 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.610 (15.49)	.590 (14.99)	.250 (6.35)	.216 (5.49)	.040 (1.02)	.203 (5.16)	0.5	3500

Other colours available, consult factory.